
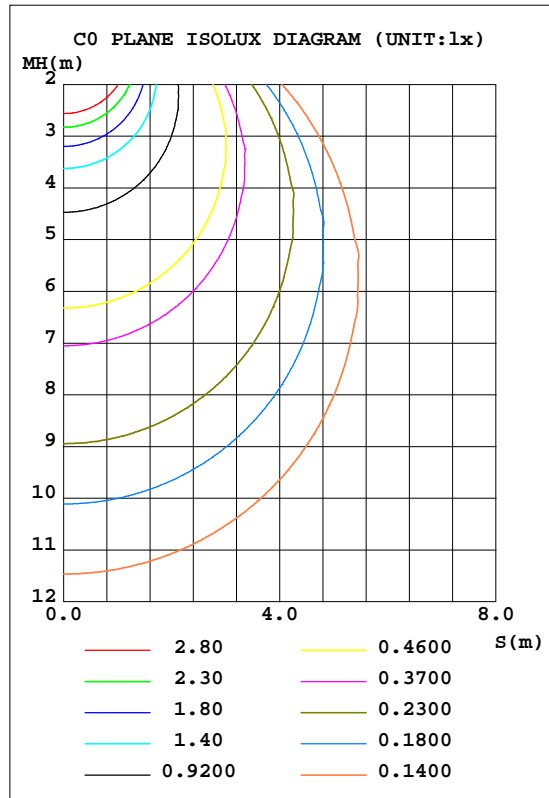


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55红光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 8.27 lm/W
MODEL		I _{max} (cd)	18.40	S/MH(C0/180)	1.22
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	48.476	η UP, DN(C0-180)	0.0,52.3
NOMINAL FLUX(lm)	48.4759	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,47.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.35

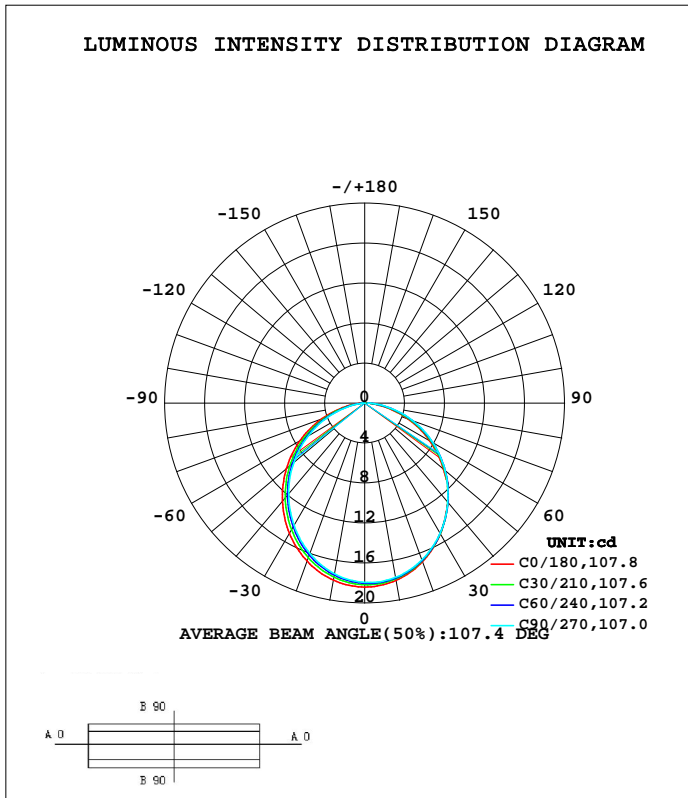

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	18.02	17.82	17.71	17.56	18.00	17.57	17.35	17.29	0- 10	1.699	1.699	3.51,3.51
20	16.90	16.79	16.71	16.56	16.84	16.31	16.03	16.05	10- 20	4.828	6.527	13.5,13.5
30	15.13	15.11	15.07	14.91	15.06	14.46	14.14	14.21	20- 30	7.211	13.74	28.3,28.3
40	12.99	12.96	12.94	12.80	12.81	12.17	11.85	11.95	30- 40	8.538	22.28	46,46
50	10.32	10.47	10.52	10.36	10.24	9.604	9.266	9.400	40- 50	8.700	30.98	63.9,63.9
60	7.496	7.779	7.868	7.707	7.448	6.835	6.493	6.641	50- 60	7.722	38.70	79.8,79.8
70	4.562	4.927	5.082	4.914	4.536	3.956	3.634	3.782	60- 70	5.776	44.47	91.7,91.7
80	1.738	2.121	2.299	2.154	1.797	1.316	1.091	1.172	70- 80	3.183	47.66	98.3,98.3
90	0.0752	0.2139	0.2900	0.2052	0.1532	0.0549	0.0385	0.0511	80- 90	0.8184	48.48	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 26.678 lm

%lum = 55.0%
 %lamp = 55.0%

Conical surface Flux(120deg): 38.698 lm


%lum = 79.8%
 %lamp = 79.8%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55紅光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

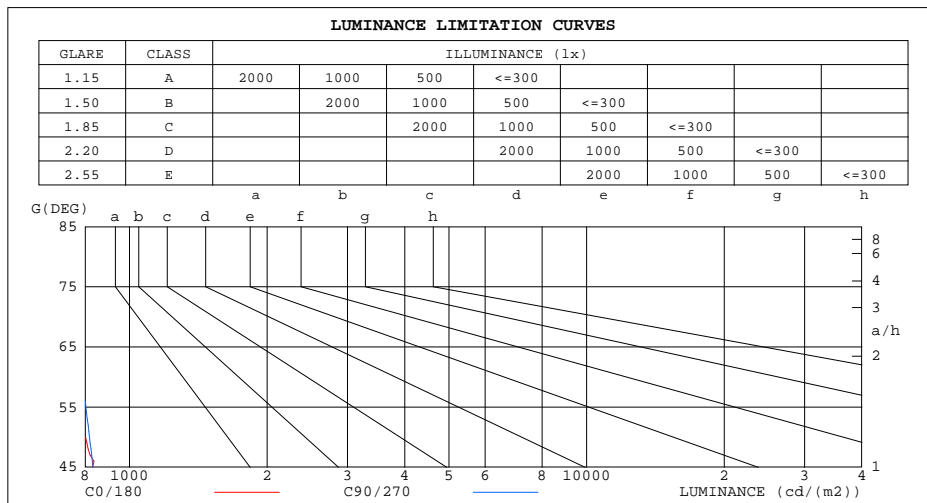

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	354	632
80	500	662
75	600	708
70	667	743
65	715	767
60	750	787
55	778	803
50	803	818
45	831	832


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP65红光		WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.86	.80	.76	.82	.78	.74	.79	.76	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.64	.73	.67	.63	.70	.65	.61	.59
4.0	.71	.62	.56	.70	.61	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.54	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.33	.43	.37	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.29	.40	.34	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

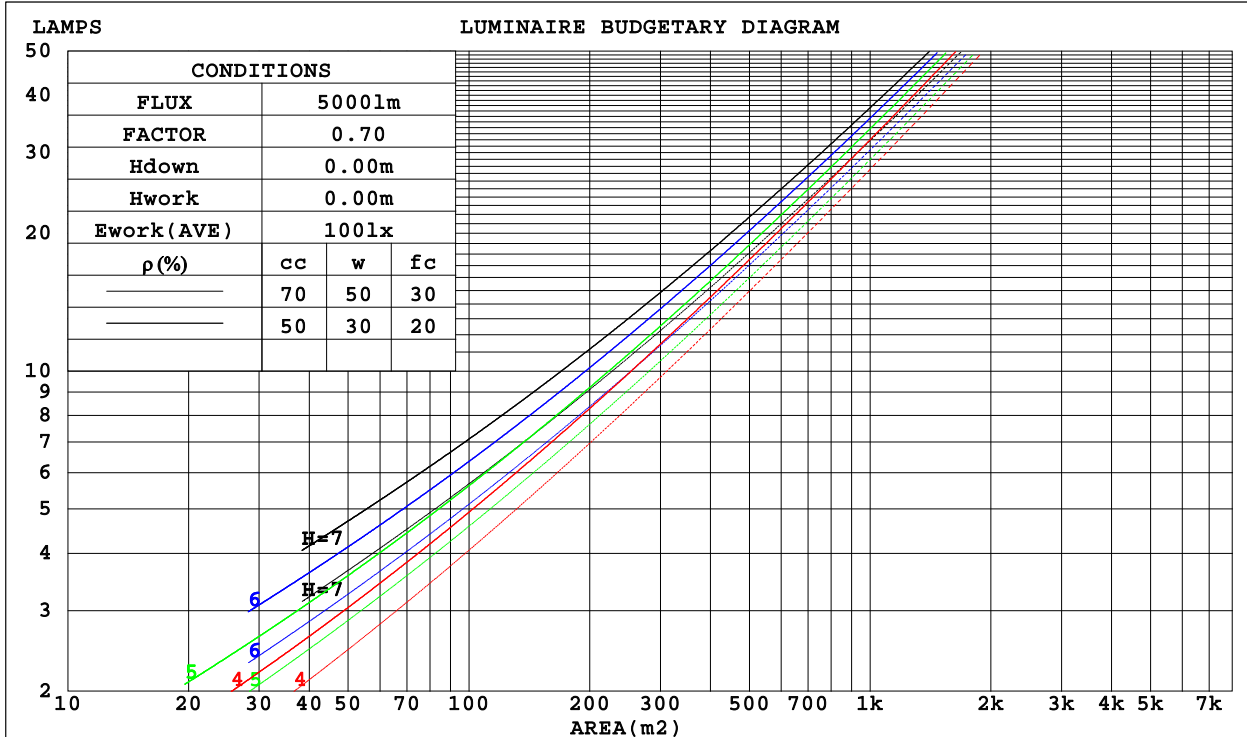

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55红光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.304	.173	.055	.297	.169	.054	.283	.163	.052	.271	.156	.050	.260	.151	.049	
2.0	.287	.157	.048	.281	.155	.048	.269	.150	.046	.258	.145	.045	.248	.140	.044	
3.0	.266	.142	.042	.261	.140	.042	.250	.136	.041	.241	.132	.040	.232	.128	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.224	.120	.036	.216	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.211	.106	.030	.208	.105	.030	.200	.103	.030	.194	.101	.030	.187	.099	.029	
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025	.165	.085	.025	
9.0	.173	.084	.023	.170	.083	.023	.165	.081	.023	.160	.080	.023	.155	.079	.023	
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.147	.074	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.099	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm										
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55红光					WEIGHT:					
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:1000*20mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.1	13.6	12.4	13.9	14.1	12.3	13.8	12.6	14.0	14.2
3H	13.6	15.0	13.9	15.2	15.5	13.9	15.3	14.2	15.5	15.8
4H	14.2	15.5	14.5	15.7	16.0	14.6	15.9	14.9	16.1	16.4
6H	14.5	15.8	14.9	16.0	16.3	15.1	16.3	15.4	16.6	16.9
8H	14.6	15.8	15.0	16.1	16.4	15.2	16.5	15.6	16.7	17.0
12H	14.6	15.8	15.0	16.1	16.4	15.4	16.5	15.7	16.8	17.1
4H 2H	12.8	14.1	13.1	14.4	14.6	12.9	14.2	13.2	14.5	14.7
3H	14.5	15.6	14.8	15.9	16.2	14.7	15.9	15.1	16.2	16.5
4H	15.1	16.2	15.5	16.5	16.8	15.5	16.6	15.9	16.9	17.2
6H	15.6	16.6	16.0	16.9	17.3	16.1	17.1	16.5	17.4	17.8
8H	15.8	16.6	16.2	17.0	17.4	16.4	17.3	16.8	17.6	18.0
12H	15.8	16.6	16.3	17.0	17.4	16.6	17.4	17.0	17.7	18.1
8H 4H	15.4	16.3	15.9	16.7	17.1	15.8	16.6	16.2	17.0	17.4
6H	16.1	16.8	16.5	17.2	17.6	16.6	17.3	17.0	17.7	18.1
8H	16.3	16.9	16.8	17.4	17.8	16.9	17.5	17.4	18.0	18.4
12H	16.4	17.0	16.9	17.4	17.9	17.2	17.7	17.6	18.2	18.6
12H 4H	15.5	16.3	15.9	16.7	17.1	15.8	16.6	16.2	17.0	17.4
6H	16.2	16.8	16.6	17.2	17.7	16.6	17.3	17.1	17.7	18.1
8H	16.4	17.0	16.9	17.4	17.9	17.0	17.5	17.5	18.0	18.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 48.48 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -10.5)
Area: 0.02 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XIAOMI
Test Date:2023-04-23

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55红光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	58	47	40	58	47	40	56	46	40	33
0.80	68	57	50	67	56	49	66	56	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	71	63
2.00	95	87	81	94	86	80	90	84	78	71
2.50	99	92	86	97	90	85	93	88	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	107	101	96	104	99	95	100	96	92	84
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP55红光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

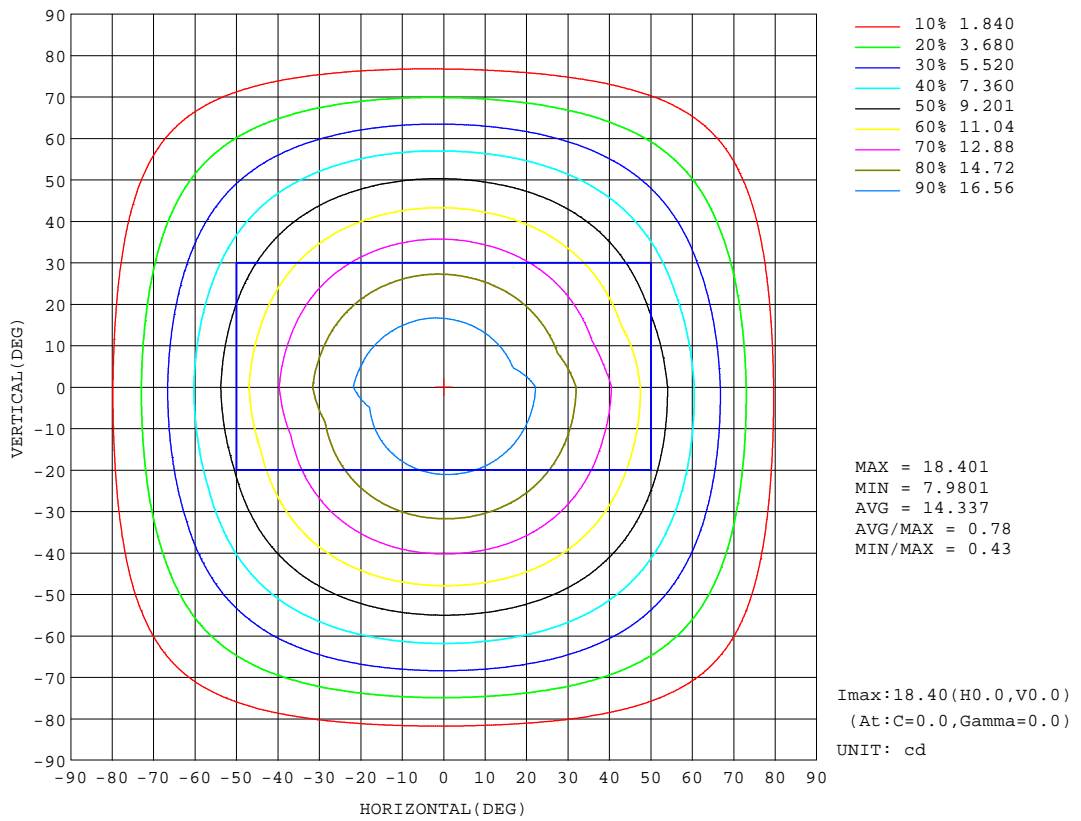


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP65红光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

Flux out:33.44 lm

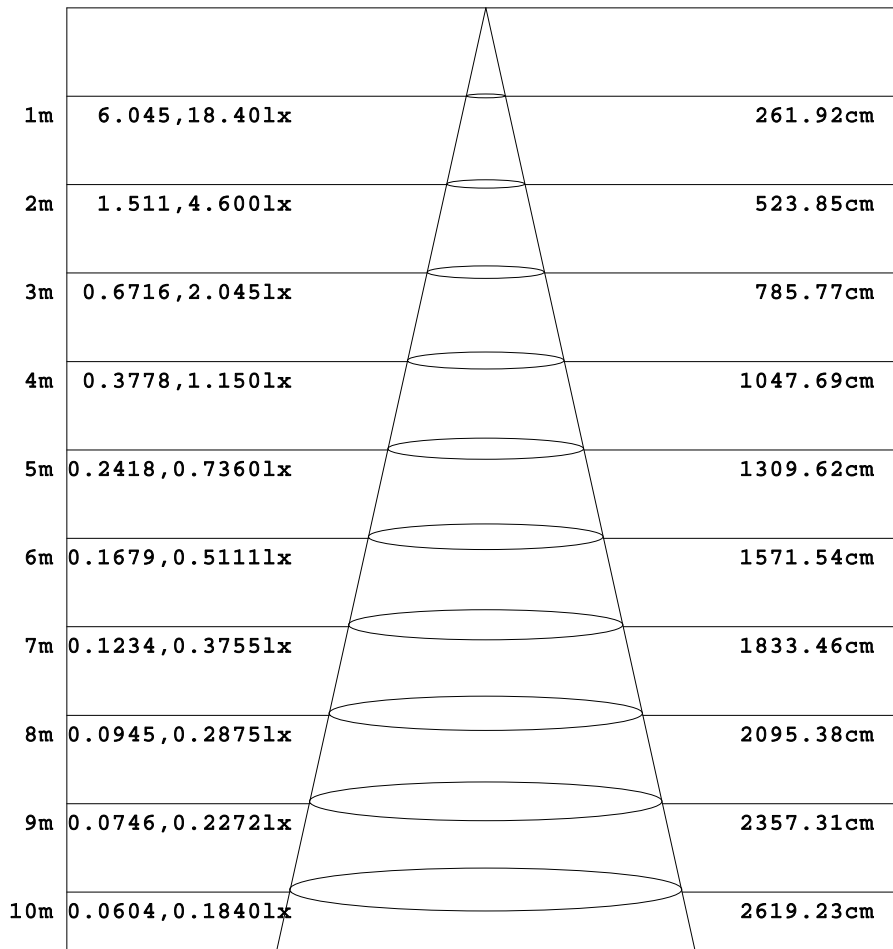

Height Eavg, Emax Angle: 105.27deg Diameter


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP65紅光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

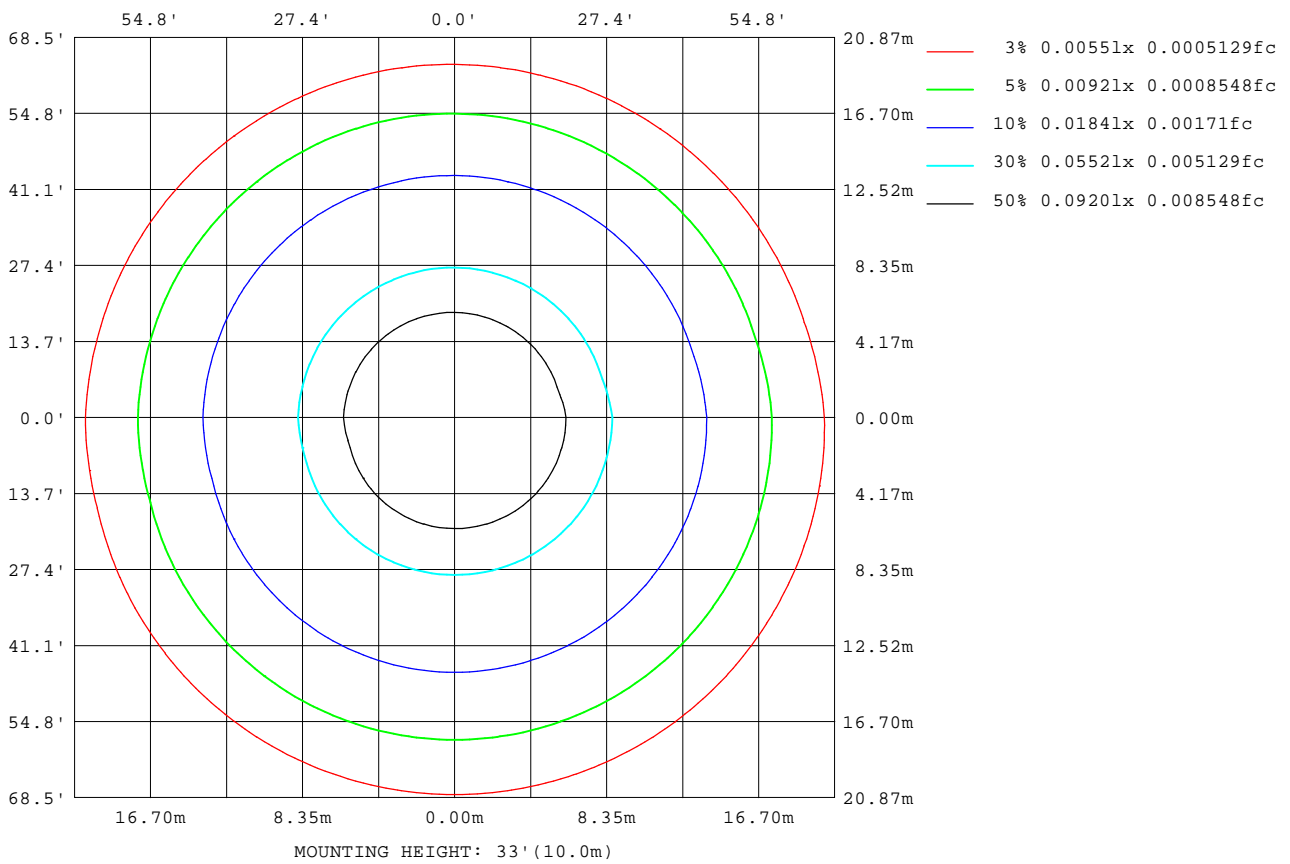

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

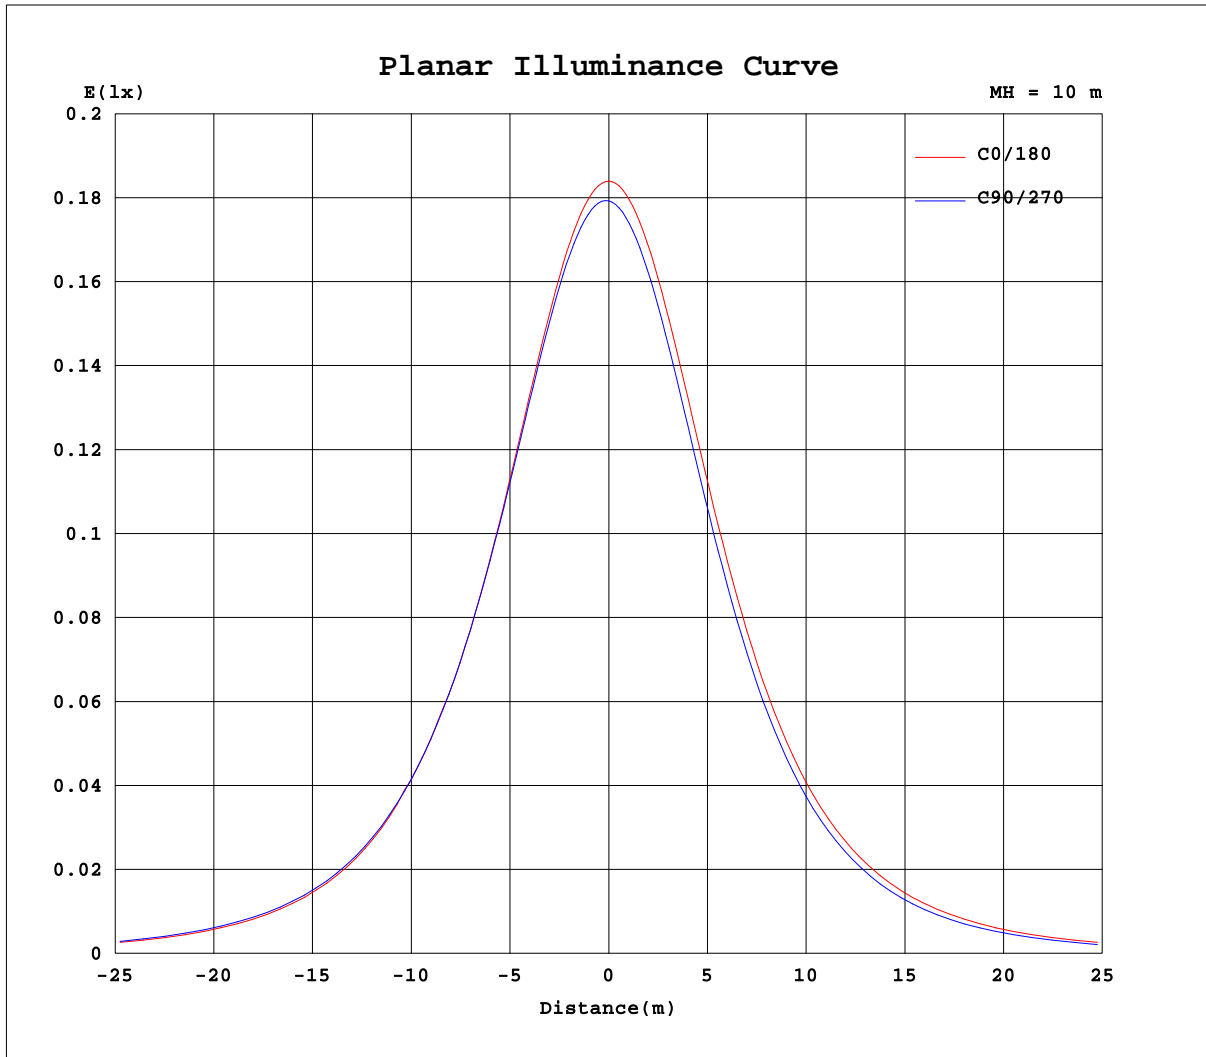

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.032V I:0.2438A P:5.8588W PF:1.0000 Freq:50.00Hz Lamp Flux:48.4759x1 lm		
NAME: UN-BJ-DMX-DC24-5050RGB-60D10S-14.4-2020-Z-IP65紅光	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*20mm	

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345																
0	17.9	17.8	17.8	17.8	17.8																
5	17.7	17.7	17.6	17.6	17.6																
10	17.3	17.3	17.3	17.3	17.3																
15	16.7	16.7	16.7	16.8	16.9																
20	16.0	16.0	16.0	16.1	16.2																
25	15.1	15.1	15.2	15.3	15.4																
30	14.1	14.1	14.2	14.3	14.5																
35	13.0	13.0	13.1	13.3	13.4																
40	11.8	11.9	12.0	12.1	12.2																
45	10.6	10.6	10.7	10.8	11.0																
50	9.24	9.30	9.40	9.55	9.74																
55	7.88	7.93	8.04	8.20	8.40																
60	6.48	6.54	6.64	6.81	7.03																
65	5.05	5.11	5.22	5.40	5.62																
70	3.62	3.67	3.78	3.97	4.19																
75	2.26	2.30	2.40	2.57	2.79																
80	1.07	1.10	1.17	1.31	1.49																
85	0.28	0.28	0.31	0.37	0.48																
90	0.04	0.04	0.05	0.06	0.08																

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-23

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: