

Neon Specifications

UN-BJ-DMX-DC24-5050RGBW-60D10S-18-9xx-1220-C-IP65



Product Features:





- One bin for luminous uniformity, soft, no light spot;
- Great performance under the operating temperature -20 °C ~ +45 °C .
- Flame & saltwater resistant, IP65, a great many varieties of light colors well-applied for different requirements.

Parameter Details :

Bending Direction: Side bend
 Color: Pixel chasing
 Control mode: DMX
 Led Type: 5050
 Led/M: 60
 Power per meter: 18W
 Working temperature: -20°C-45°C
 Voltage: DC24V


Lumens output:

● 2700K	135	● R	46
● 3000K	143	● G	118
● 4000K	160	● B	60
● 6000K	155	● RGBW	-

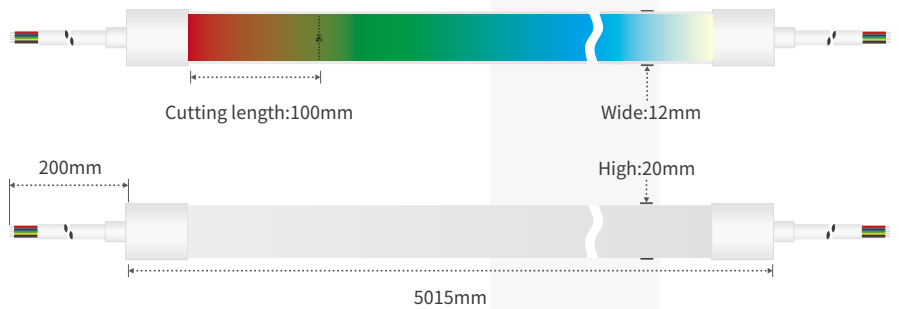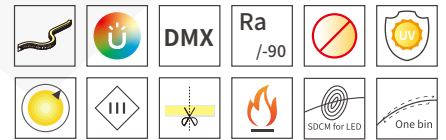

*Waterproof connectors available(image for reference)

Light Distribution:

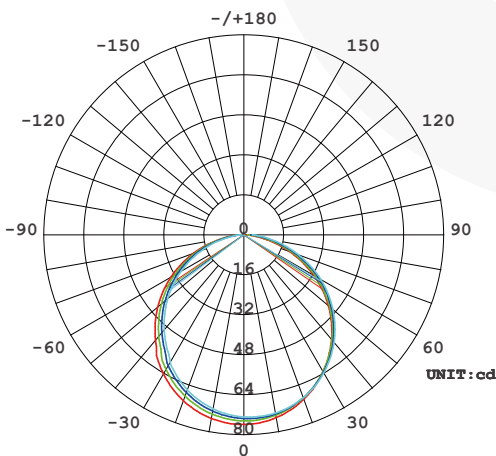

AVERAGE BEAM ANGLE (50%) :112.1 DEG

Flux out:147.9 lm

Height	Eavg, Emax	Angle:109.65deg	Diameter
1m	23.08, 75.87lx		283.78cm
2m	5.769, 18.97lx		567.56cm
3m	2.564, 8.430lx		851.34cm
4m	1.442, 4.742lx		1135.12cm
5m	0.9230, 3.035lx		1418.90cm
6m	0.6410, 2.108lx		1702.68cm
7m	0.4709, 1.548lx		1986.46cm
8m	0.3606, 1.186lx		2270.24cm
9m	0.2849, 0.9367lx		2554.02cm
10m	0.2308, 0.7587lx		2837.80cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Packaging Details:

· standard packaging


1. Technical details marked on the side of strip packed in circles.




2. Pack the circled strip with blister.

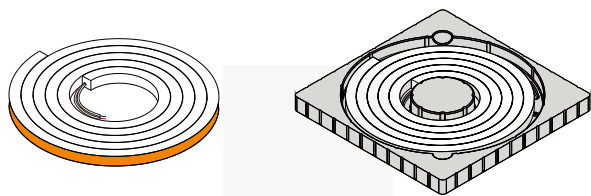


3. Put strip with blister into inner box.

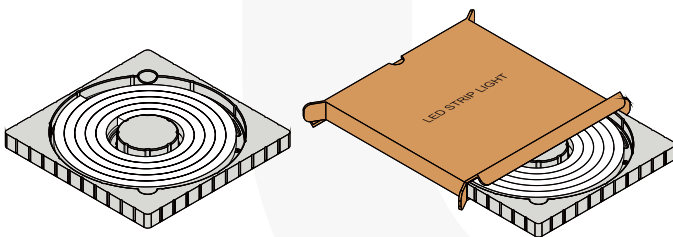


4. Stick the label at the bottom of inner box.

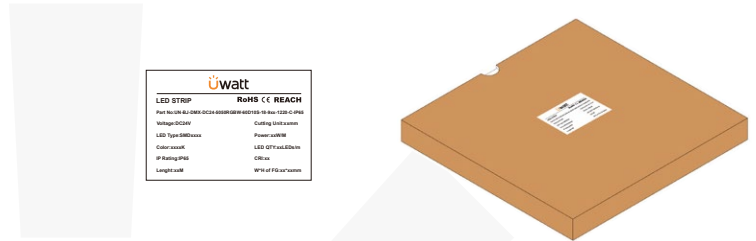

5. Put Ten boxes into outer carton.

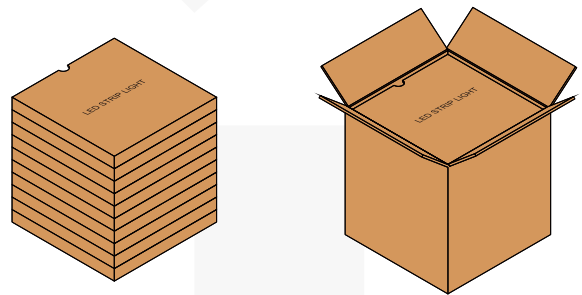

6. Put the packing list on outer carton.

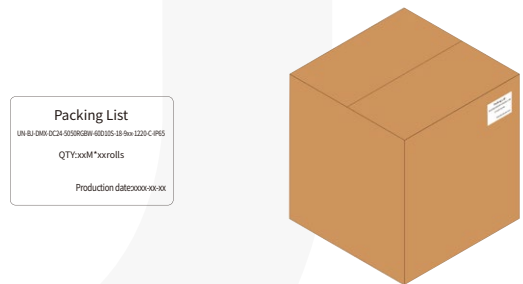

Model	Product size	Product Quantity/box	Product Quantity/case	Product net weight (kg)	Net weight per box (kg)	Gross weight (kg)	Carton size
UN-BJ-DMX-DC24-5050RGBW-60D10S-18-9xx-1220-C-IP65	L5000*12*20mm	5M*1	50M	1.39	1.79	19.47	440*425*420MM

Precautions:

· Please use an isolated power supply to drive the LED light bar, and the ripple of the constant voltage source is less than 5%. Do not use resistance-capacitance step-down, non-isolated power supplies to drive the LED light bar.

· In actual applications, the power supply should reserve 20% of the margin (it is recommended to use only 80% of the power) to ensure sufficient voltage to drive the product.

· Please operate carefully, do not touch the AC power terminal when the power is on to prevent electric shock.

· Pay attention to the positive and negative poles of the power cord, and do not connect it wrongly. Whether the voltage of the power supply and the product are the same, so as to avoid damage to the product.

· During the installation process, please avoid scratching, twisting and irregular bending of the product, otherwise it may cause irreparable damage to the product.

· In order to ensure the life and reliability of the light strip, please do not bend it in an arc with a radius of less than 60mm. A too small bending radius will damage the product itself.

· If the actual application length exceeds the specified use length, it will cause the lamp belt to overload and heat, and the brightness is uneven.

· In order to prevent your eyes from being hurt, try to avoid staring at the light-emitting surface of the light bar for a long time.

· Non-professionals are prohibited from installing, disassembling and repairing the product.

· It is strictly forbidden to use any acidic or alkaline adhesives to fix products (including but not limited to glass glue, etc.).

· IP67 protection products are not suitable for swimming pool underwater.

· Products of different sizes and specifications under the same color temperature value due to structural differences, the final color of the product is slightly deviated, and it must be confirmed before use.

· When the IP67 protection product is installed and applied, the waterproof level needs to be downgraded after self-processing and cutting.

· Please use professional cutting tools when cutting.

· Engineering packaging neon light belt (20~50m), please use pay-off rack during construction to avoid damage to the product caused by pulling force.

· Attention, there are 2 soldering parts per reel (5m/reel) at most when mass production.



No stretching



No distortion



No trampling