
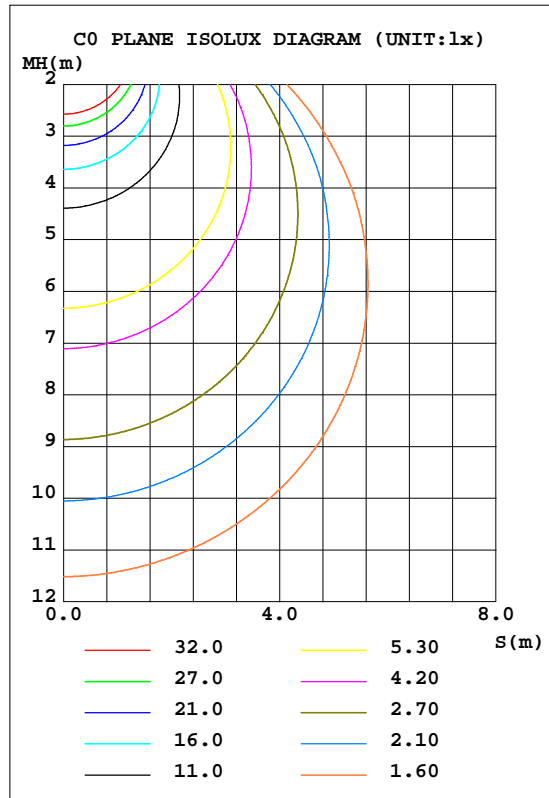


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.95 lm/W			
MODEL		I _{max} (cd)	214.2	S/MH(C0/180)	1.29
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	626.74	η UP,DN(C0-180)	0.0,51.4
NOMINAL FLUX(lm)	626.735	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.35

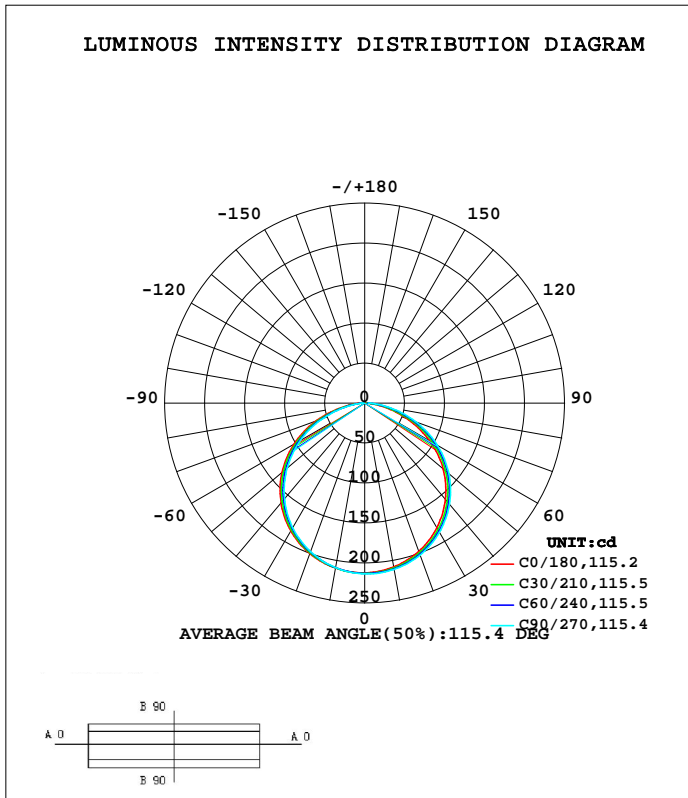

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	208.2	210.2	211.3	211.9	209.6	209.2	209.0	209.4	0- 10	20.21	20.21	3.22,3.22
20	197.5	200.7	202.3	203.0	200.4	198.7	197.8	198.1	10- 20	58.12	78.32	12.5,12.5
30	180.4	184.8	186.8	187.6	184.8	181.8	180.1	180.3	20- 30	88.76	167.1	26.7,26.7
40	157.1	162.6	165.0	166.0	162.9	158.7	156.2	156.2	30- 40	108.1	275.2	43.9,43.9
50	128.2	134.5	137.5	138.4	135.0	129.9	126.7	126.6	40- 50	113.5	388.7	62,62
60	93.33	101.1	104.6	105.3	101.7	95.97	92.79	92.46	50- 60	103.5	492.2	78.5,78.5
70	55.53	63.52	67.56	67.79	64.13	58.16	54.03	53.70	60- 70	78.93	571.2	91.1,91.1
80	19.48	24.99	29.74	28.89	26.36	21.81	18.77	18.24	70- 80	43.73	614.9	98.1,98.1
90	0.4856	2.951	4.580	3.884	1.258	1.385	0.8363	0.8937	80- 90	11.83	626.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 332.24 lm

%lum = 53.0%
 %lamp = 53.0%

Conical surface Flux(120deg): 492.24 lm


%lum = 78.5%
 %lamp = 78.5%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

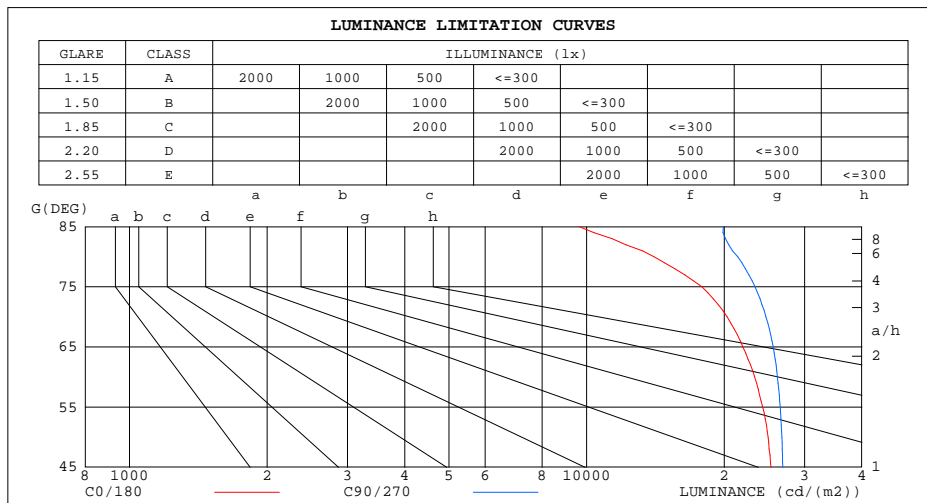

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9616	19901
80	14024	21410
75	17888	23346
70	20293	24691
65	21987	25595
60	23331	26155
55	24287	26522
50	24939	26737
45	25337	26868


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.99	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.82	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.52	.62	.56	.52	.50
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

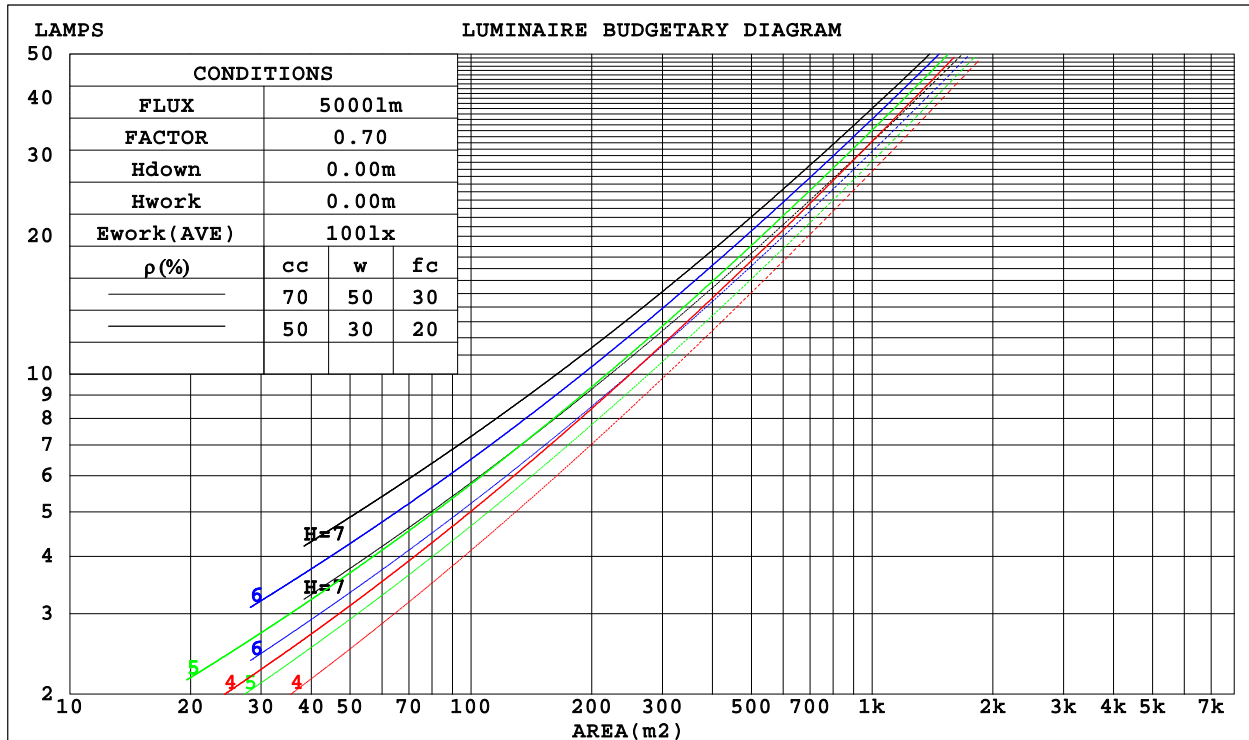

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.291	.167	.053	.279	.161	.052	.267	.155	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.183	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm										
NAME: UN-DC24-2835-64-4.8-9740-W8-3M					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:1000*8mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.0	25.6	24.3	25.8	26.0	24.5	26.0	24.7	26.2	26.4
3H	25.4	26.9	25.7	27.1	27.3	26.1	27.5	26.4	27.7	28.0
4H	25.9	27.3	26.3	27.5	27.8	26.8	28.1	27.1	28.4	28.6
6H	26.2	27.5	26.6	27.8	28.1	27.2	28.5	27.6	28.8	29.1
8H	26.3	27.5	26.6	27.8	28.1	27.4	28.6	27.7	28.9	29.2
12H	26.3	27.5	26.7	27.8	28.1	27.5	28.7	27.9	29.0	29.3
4H 2H	24.7	26.1	25.0	26.3	26.6	25.0	26.4	25.4	26.6	26.9
3H	26.3	27.5	26.7	27.8	28.1	26.9	28.0	27.2	28.3	28.6
4H	26.9	28.0	27.3	28.3	28.7	27.6	28.7	28.0	29.0	29.4
6H	27.3	28.3	27.7	28.6	29.0	28.3	29.2	28.7	29.6	29.9
8H	27.4	28.3	27.8	28.7	29.1	28.5	29.4	28.9	29.7	30.1
12H	27.5	28.3	27.9	28.7	29.1	28.6	29.5	29.1	29.8	30.2
8H 4H	27.2	28.1	27.6	28.5	28.9	27.9	28.8	28.3	29.1	29.5
6H	27.8	28.5	28.2	28.9	29.3	28.6	29.4	29.1	29.8	30.2
8H	27.9	28.6	28.4	29.0	29.5	28.9	29.6	29.4	30.0	30.5
12H	28.0	28.6	28.5	29.1	29.5	29.2	29.7	29.7	30.2	30.7
12H 4H	27.2	28.1	27.7	28.5	28.9	27.9	28.7	28.3	29.1	29.5
6H	27.8	28.5	28.3	28.9	29.4	28.7	29.3	29.1	29.7	30.2
8H	28.0	28.6	28.5	29.1	29.5	29.0	29.6	29.5	30.0	30.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 626.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.6)
 Area: 0.008 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

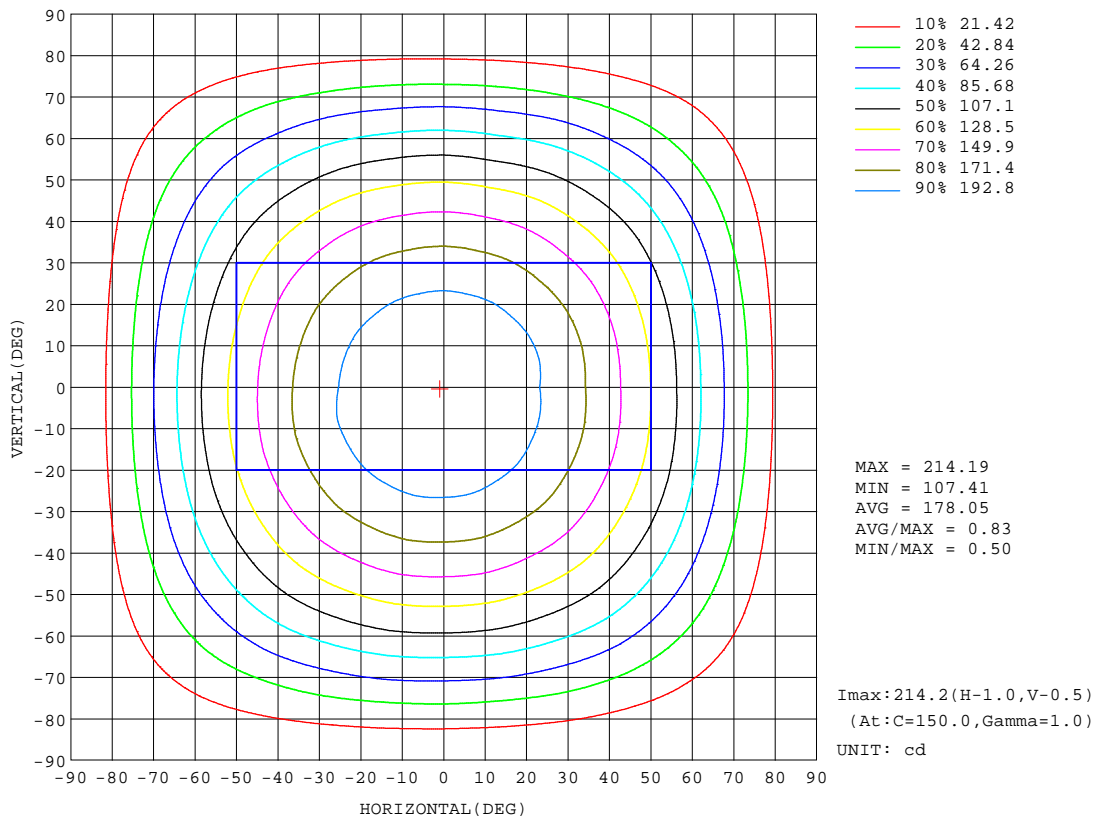


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Flux out:473.1 lm

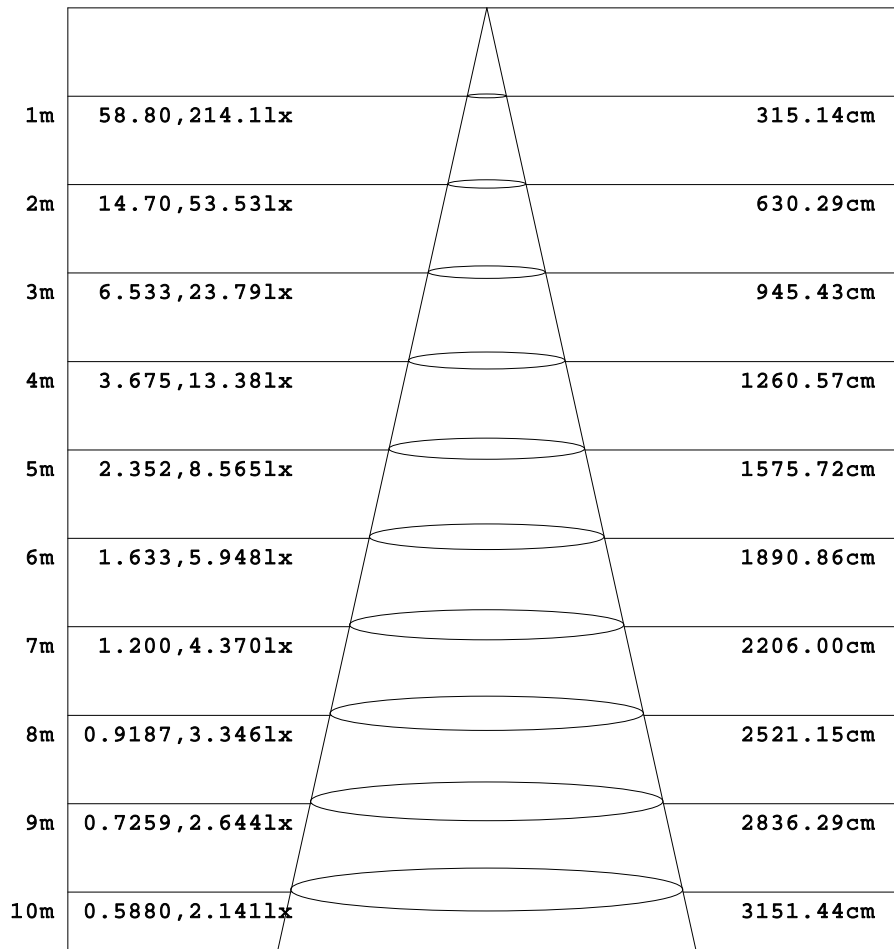

Height Eavg, Emax Angle:115.20deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

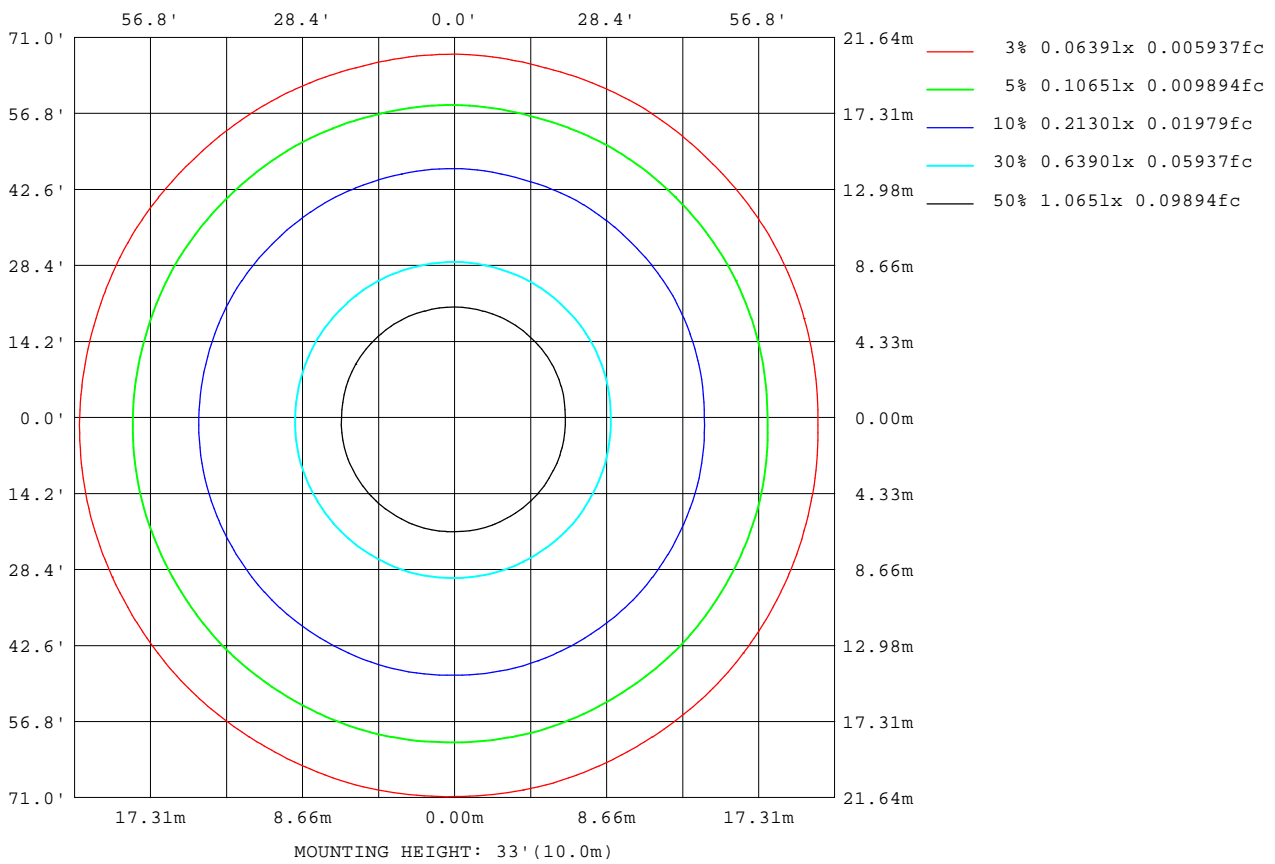

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

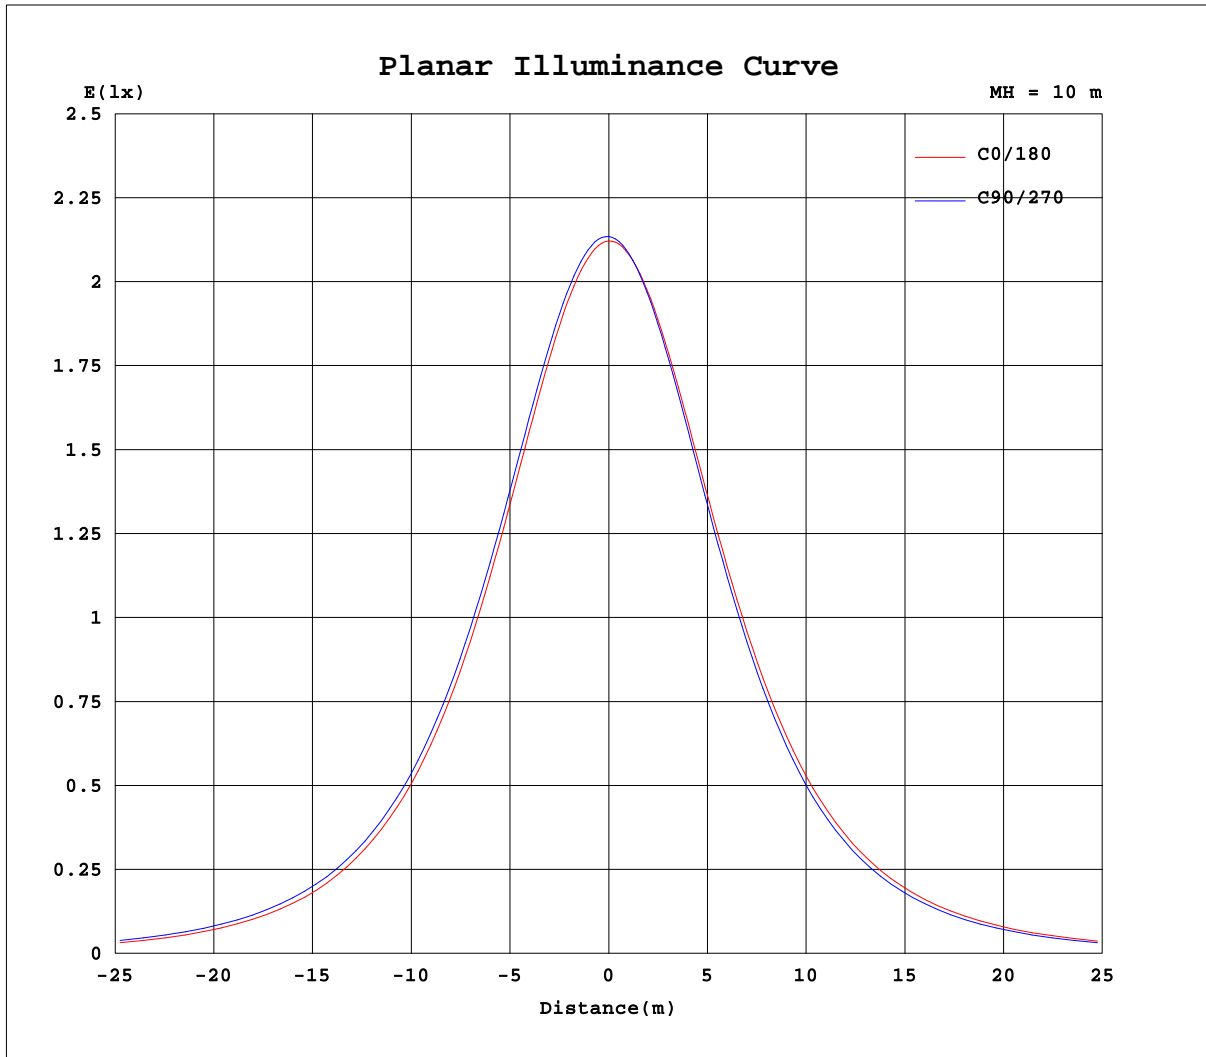

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	212	213	213	213	213	213	214	214	214	214	214	214	212	213	213	213	213	213	214
5	211	212	212	212	213	213	213	214	214	214	214	214	212	212	212	212	212	212	212
10	208	209	209	210	210	211	211	212	212	212	212	212	210	210	209	209	209	209	209
15	204	205	205	206	207	207	208	208	208	208	208	208	206	206	205	205	205	204	204
20	198	199	200	201	201	202	202	203	203	203	203	203	200	200	200	199	198	198	198
25	190	191	192	194	194	195	195	196	196	196	196	196	193	193	192	191	191	190	190
30	180	182	183	185	185	187	187	188	187	188	187	187	185	184	183	182	181	180	180
35	170	172	173	174	175	177	177	178	177	178	177	177	175	173	173	171	170	169	169
40	157	159	161	163	163	165	165	166	166	166	165	165	163	161	161	159	158	156	156
45	143	146	147	149	150	152	152	153	153	153	152	152	150	148	147	145	144	142	142
50	128	131	132	135	135	137	137	139	138	138	137	137	135	133	132	130	129	127	127
55	111	114	116	118	120	121	122	123	122	123	121	121	119	117	116	114	112	111	110
60	93.3	96.7	98.4	101	102	104	105	106	105	105	104	103	102	99.6	98.4	96.0	94.9	93.1	92.8
65	74.3	77.0	79.9	82.7	84.1	86.1	86.5	87.6	87.0	87.0	85.5	84.9	83.3	81.0	79.8	77.1	76.0	74.3	74.3
70	55.5	57.1	60.2	63.5	65.0	67.1	67.6	68.7	67.9	67.8	66.3	65.6	64.1	61.9	60.3	58.2	56.5	55.6	54.0
75	37.0	38.2	40.5	43.3	45.8	46.9	48.3	48.4	48.5	47.3	46.9	45.3	44.0	42.8	40.7	39.3	37.5	36.5	35.6
80	19.5	21.3	22.9	25.0	27.3	28.7	29.7	29.9	29.7	28.9	28.5	27.4	26.4	24.9	23.2	21.8	20.4	19.4	18.8
85	6.70	8.13	9.39	10.7	12.3	13.2	13.9	14.1	13.8	13.4	13.1	12.7	11.9	10.7	9.38	8.39	7.53	6.82	6.29
90	0.49	1.85	2.37	2.95	3.70	4.21	4.58	4.56	3.98	3.88	3.85	3.54	1.26	2.00	1.72	1.38	1.11	0.96	0.84

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.215V I:0.2023A P:4.8984W PF:1.0000 Freq:50.00Hz Lamp Flux:626.735x1 lm		
NAME: UN-DC24-2835-64-4.8-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	214	214	214	214	214														
5	212	213	213	213	213														
10	209	209	209	210	210														
15	204	205	205	205	205														
20	198	198	198	199	199														
25	189	190	190	191	191														
30	180	180	180	181	181														
35	168	169	169	170	170														
40	156	156	156	157	158														
45	141	142	142	143	144														
50	125	127	127	128	128														
55	109	110	110	111	112														
60	91.2	92.4	92.5	93.1	93.4														
65	72.9	73.7	73.0	74.3	74.4														
70	53.9	53.5	53.7	53.7	55.1														
75	35.3	35.0	34.9	35.2	36.5														
80	18.4	18.2	18.2	18.8	19.0														
85	6.19	6.18	6.49	6.56	6.63														
90	0.79	0.83	0.89	0.84	0.59														

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 15.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Temperature: 25.3DEG	Humidity: 65.0%
Operators: XIAOMI	Test Distance: 9.000m [K=1.0000]
Test Date: 2023-04-20	Remarks: