
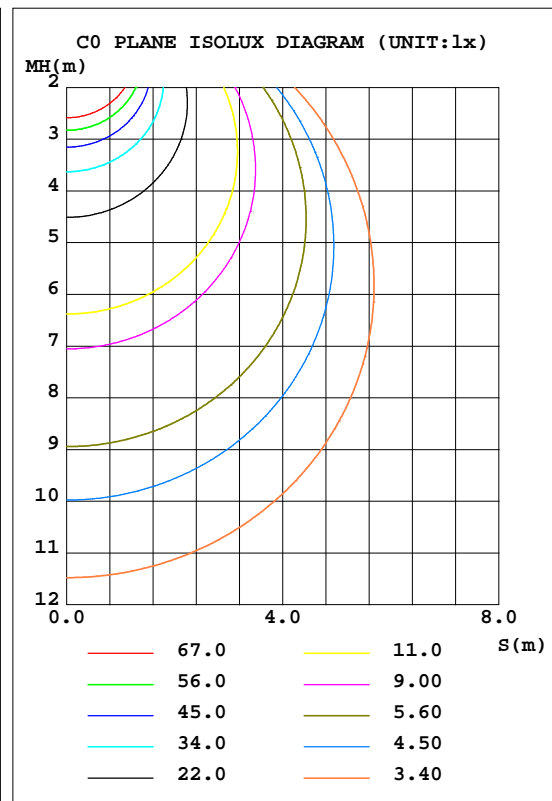


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.32 lm/W			
MODEL		I <sub>max</sub> (cd)	453.9	S/MH(C0/180)	1.27
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	1327.9	η UP, DN(C0-180)	0.0,51.8
NOMINAL FLUX(lm)	1327.86	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,48.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.35

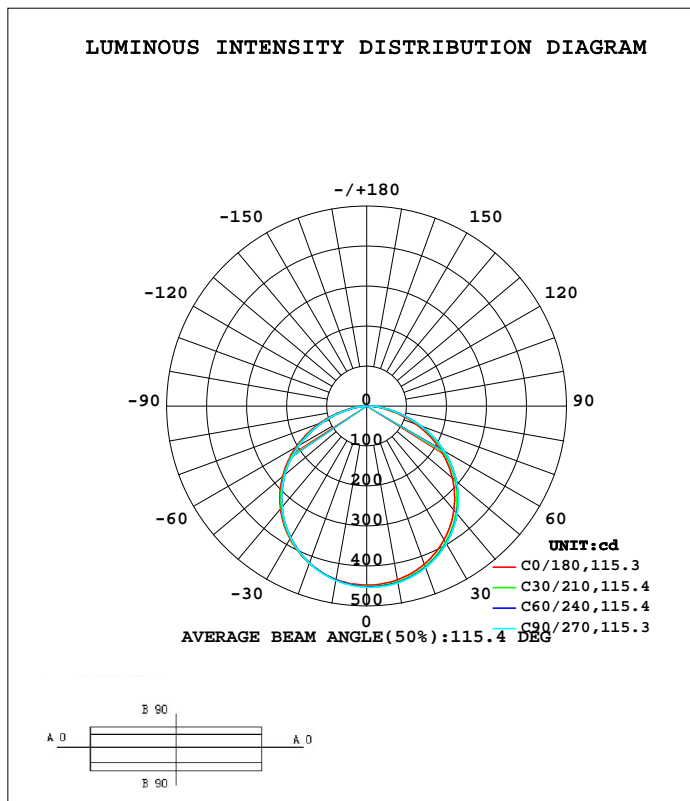

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	441.2	447.3	448.9	448.3	440.3	441.6	442.8	444.8	0- 10	42.82	42.82	3.22,3.22
20	420.9	428.9	430.3	428.5	418.9	417.7	418.5	421.8	10- 20	123.1	166.0	12.5,12.5
30	386.8	396.6	397.8	394.9	383.8	380.1	380.6	385.2	20- 30	188.1	354.0	26.7,26.7
40	339.5	350.9	351.7	347.8	335.7	329.7	329.7	335.4	30- 40	229.1	583.1	43.9,43.9
50	279.7	292.6	293.2	288.3	275.3	267.4	267.5	273.7	40- 50	240.4	823.5	62,62
60	209.3	222.4	223.3	217.1	203.5	194.7	194.6	201.6	50- 60	219.3	1043	78.5,78.5
70	129.8	143.2	144.1	137.0	123.9	114.2	114.2	121.7	60- 70	167.4	1210	91.1,91.1
80	52.12	61.17	63.13	56.31	45.77	37.84	36.28	44.07	70- 80	93.17	1303	98.2,98.2
90	1.159	7.644	6.378	6.709	2.291	2.315	1.418	2.898	80- 90	24.48	1328	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 703.91 lm

%lum = 53.0%  
 %lamp = 53.0%

Conical surface Flux(120deg): 1042.8 lm


%lum = 78.5%  
 %lamp = 78.5%

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

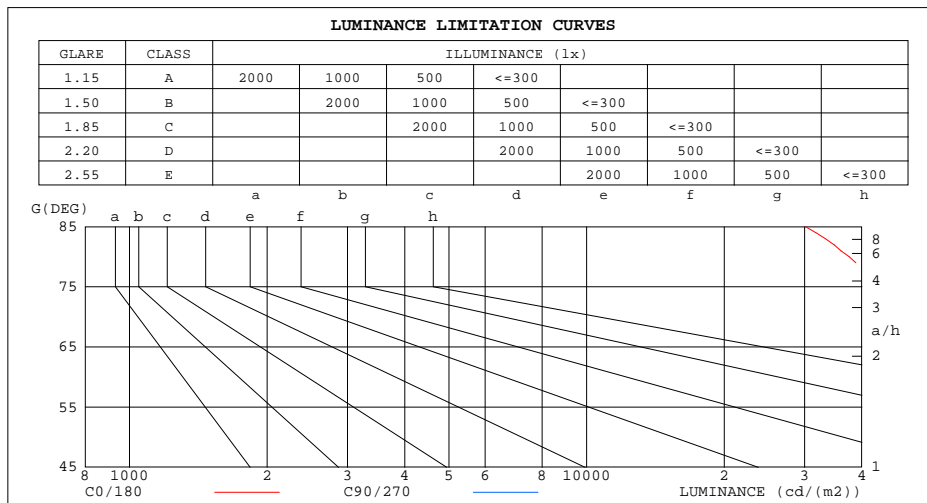


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.52	.62	.56	.52	.50
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

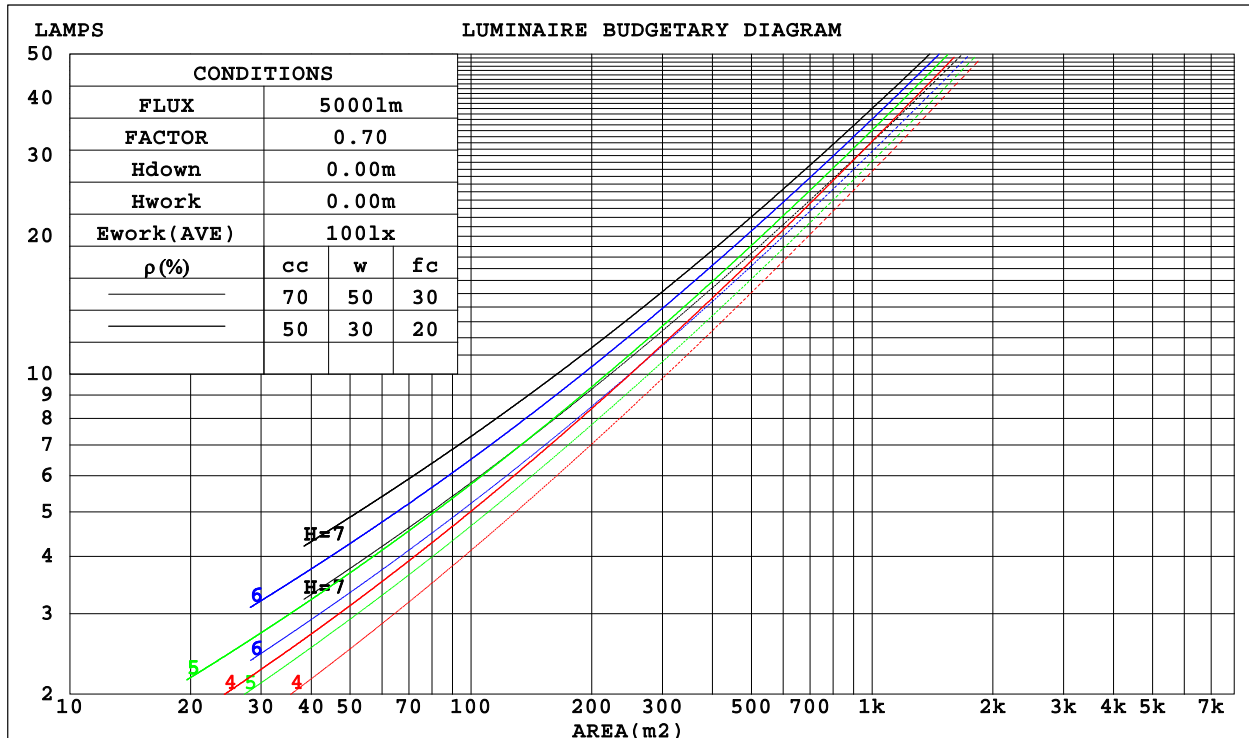

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.291	.167	.053	.278	.161	.052	.267	.155	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.183	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm										
NAME: UN-DC24-2835-128-9.6-9740-W8-3M					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:1000*8mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.9	28.5	27.2	28.7	28.9	27.2	28.7	27.5	28.9	29.1
3H	28.5	29.9	28.8	30.1	30.4	28.8	30.3	29.1	30.5	30.7
4H	29.1	30.4	29.4	30.7	30.9	29.5	30.8	29.8	31.1	31.4
6H	29.5	30.7	29.8	31.0	31.3	30.0	31.3	30.3	31.5	31.8
8H	29.6	30.8	29.9	31.1	31.4	30.1	31.4	30.5	31.7	31.9
12H	29.6	30.8	30.0	31.1	31.4	30.2	31.4	30.6	31.7	32.0
4H 2H	27.6	29.0	28.0	29.2	29.5	27.8	29.2	28.1	29.4	29.7
3H	29.4	30.5	29.7	30.8	31.1	29.7	30.8	30.0	31.1	31.4
4H	30.1	31.2	30.5	31.5	31.8	30.5	31.5	30.8	31.9	32.2
6H	30.6	31.6	31.0	31.9	32.3	31.1	32.0	31.5	32.4	32.8
8H	30.8	31.7	31.2	32.0	32.4	31.3	32.2	31.7	32.6	32.9
12H	30.9	31.7	31.3	32.1	32.5	31.5	32.3	31.9	32.7	33.1
8H 4H	30.4	31.3	30.8	31.7	32.1	30.7	31.6	31.1	32.0	32.4
6H	31.1	31.8	31.5	32.2	32.7	31.5	32.3	32.0	32.7	33.1
8H	31.3	32.0	31.8	32.4	32.9	31.8	32.5	32.3	32.9	33.4
12H	31.5	32.1	32.0	32.5	33.0	32.1	32.6	32.5	33.1	33.6
12H 4H	30.4	31.2	30.9	31.6	32.0	30.7	31.6	31.2	31.9	32.4
6H	31.2	31.8	31.6	32.2	32.7	31.6	32.2	32.0	32.7	33.1
8H	31.5	32.0	31.9	32.5	33.0	31.9	32.5	32.4	32.9	33.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 1328 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.0)  
 Area: 0.008 m2

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

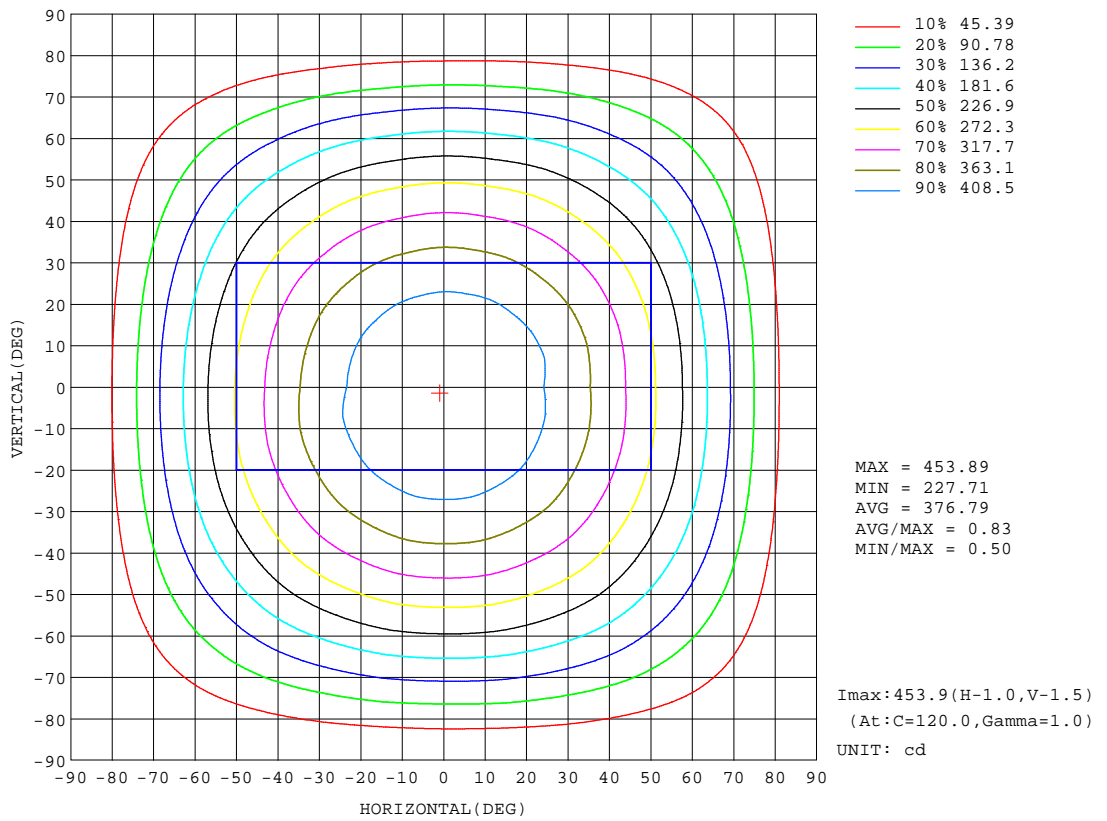

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20


γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:



AAI Figure

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Flux out:1002 lm

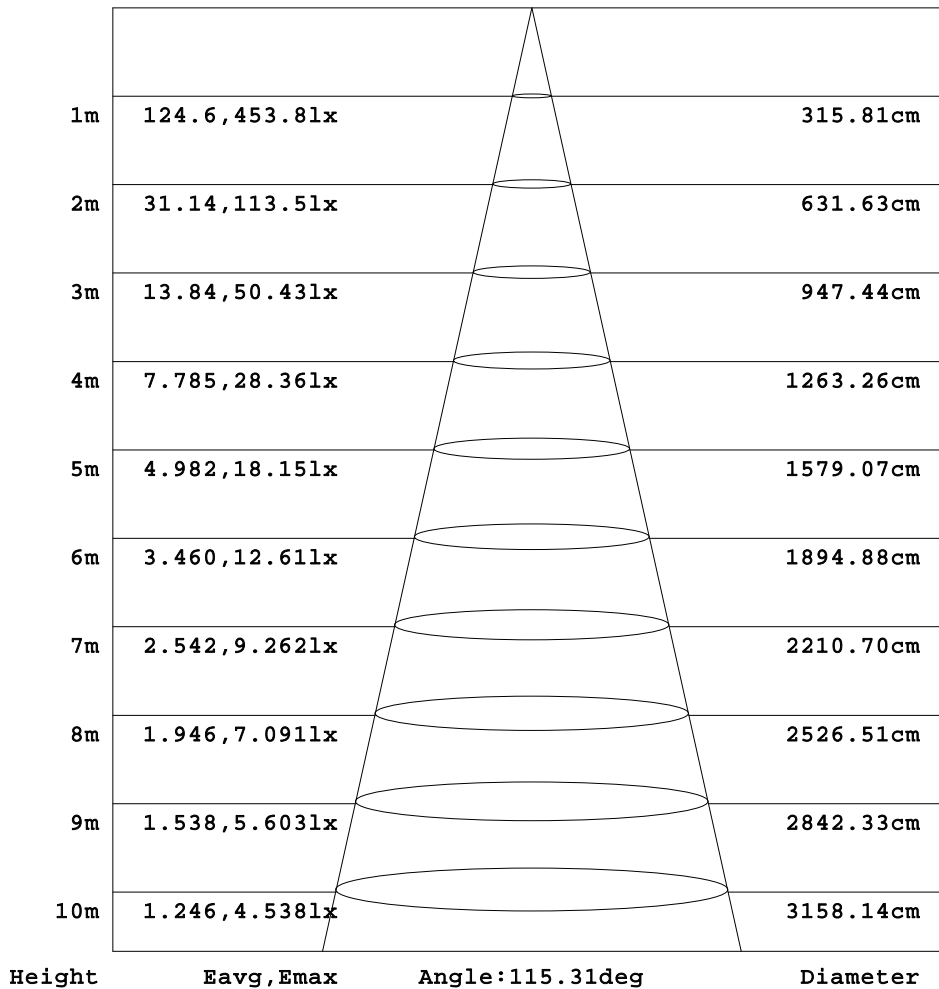


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

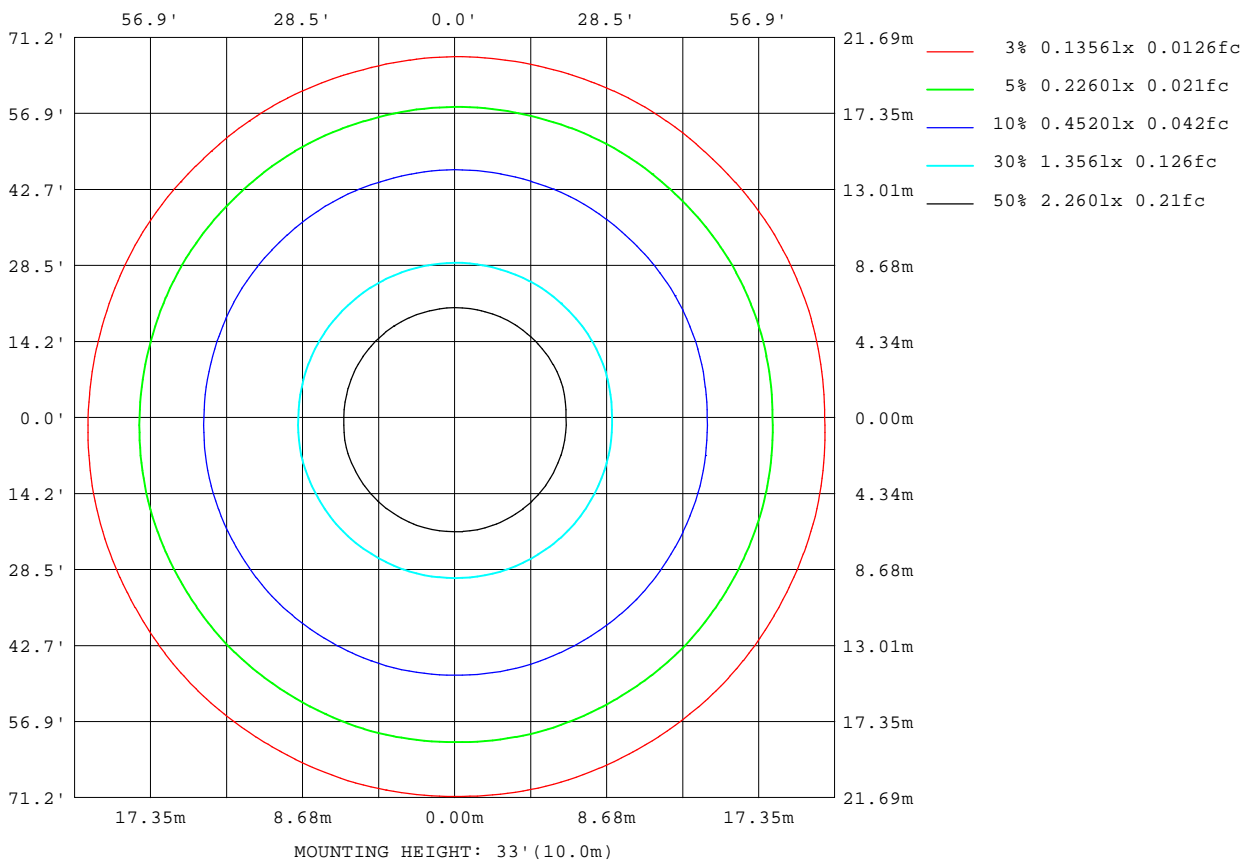

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

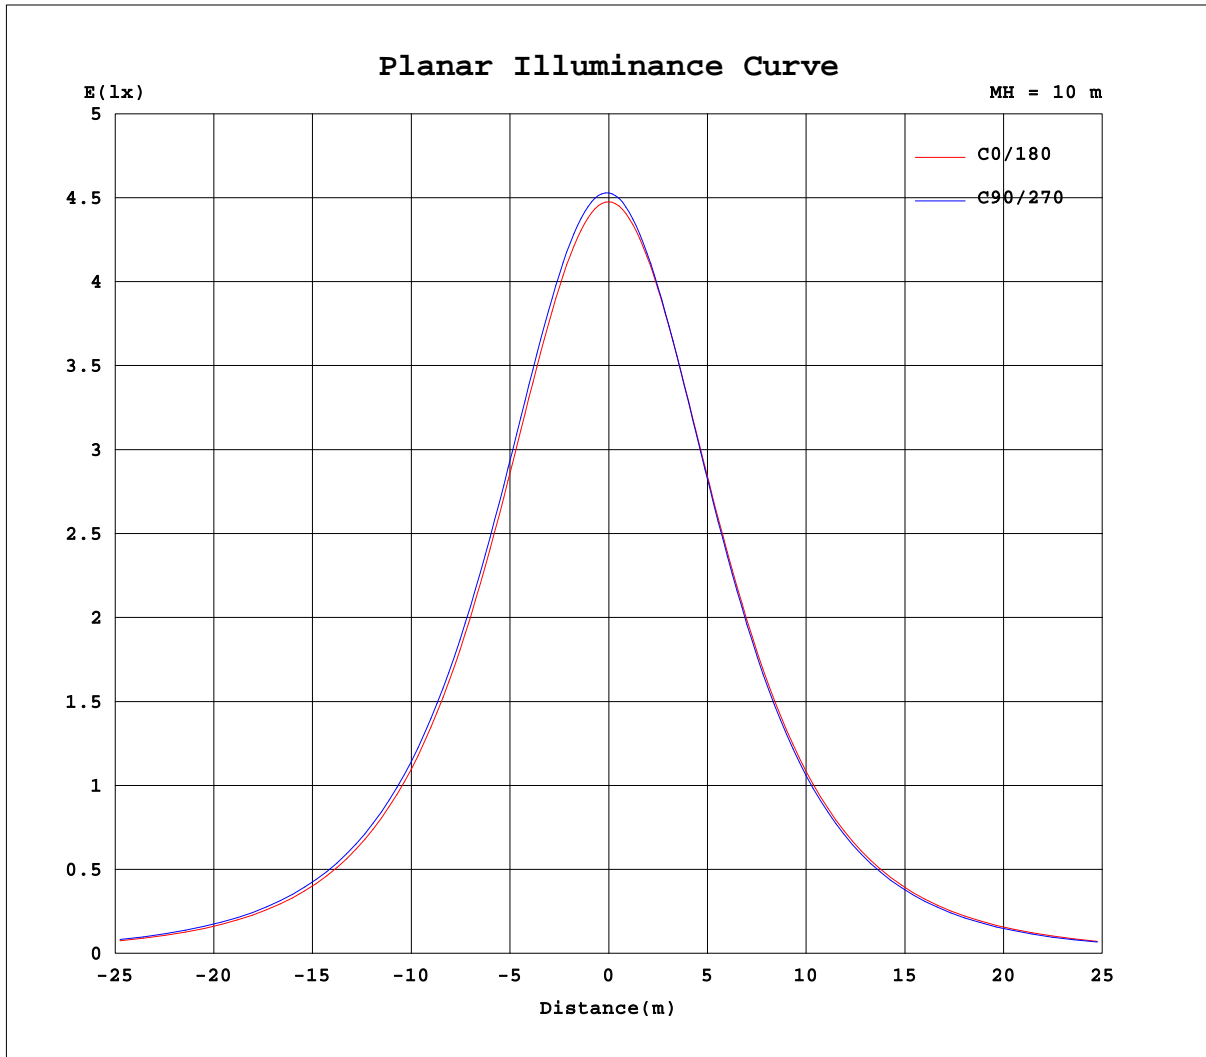

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: XIAOMI  
Test Date: 2023-04-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
Humidity: 65.0%  
Test Distance: 9.000m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	448	450	451	451	452	453	453	453	454	454	454	454	448	450	451	451	452	453	453
5	446	449	450	451	452	452	453	453	453	453	452	452	446	447	448	448	449	449	450
10	441	444	446	447	448	449	449	449	449	448	447	447	440	441	442	442	442	442	443
15	433	436	438	440	440	441	441	442	441	440	439	438	431	432	432	431	432	431	432
20	421	425	427	429	430	431	430	430	429	429	427	425	419	419	419	418	418	417	419
25	406	410	412	415	415	416	416	416	414	413	411	410	403	402	402	401	401	400	401
30	387	391	394	397	397	398	398	398	396	395	392	390	384	382	382	380	380	379	381
35	365	370	372	375	376	377	376	376	374	373	370	368	361	360	359	356	356	355	357
40	340	345	348	351	351	353	352	352	349	348	344	342	336	333	332	330	330	328	330
45	311	317	320	323	324	325	324	324	321	320	315	313	307	304	303	300	300	298	300
50	280	285	288	293	293	295	293	293	290	288	284	281	275	272	271	267	267	266	268
55	246	252	254	259	259	261	260	259	256	254	249	246	241	237	236	232	232	230	232
60	209	215	218	222	223	225	223	223	219	217	212	209	204	200	198	195	194	193	195
65	170	176	179	184	185	187	185	184	180	178	172	169	164	160	158	155	155	153	155
70	130	135	139	143	144	146	144	144	140	137	132	128	124	120	118	114	114	112	114
75	90.0	95.0	97.9	102	103	104	102	102	98.3	95.6	90.9	87.6	83.8	79.5	77.3	73.8	73.4	72.1	73.9
80	52.1	56.3	59.2	61.2	63.3	64.8	63.1	62.0	59.3	56.3	52.9	49.1	45.8	43.2	40.0	37.8	36.0	35.8	36.3
85	21.0	24.5	27.4	28.3	29.3	29.3	28.9	27.6	26.3	24.8	22.8	20.7	18.2	16.5	14.1	12.1	10.7	10.0	10.1
90	1.16	5.44	7.50	7.64	7.37	6.96	6.38	6.82	6.92	6.71	6.28	5.25	2.29	3.57	3.06	2.32	1.84	1.52	1.42

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.209V I:0.4377A P:10.596W PF:1.0000 Freq:50.00Hz Lamp Flux:1327.86x1 lm		
NAME: UN-DC24-2835-128-9.6-9740-W8-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*8mm	

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	453	454	454	454	454														
5	450	451	451	452	452														
10	443	444	445	446	446														
15	433	434	435	437	438														
20	419	421	422	424	425														
25	402	404	405	408	409														
30	381	384	385	389	390														
35	357	360	362	366	367														
40	330	334	335	340	342														
45	300	304	306	310	312														
50	268	272	274	278	281														
55	233	237	239	244	246														
60	195	200	202	207	209														
65	156	160	162	167	170														
70	115	119	122	127	129														
75	75.1	78.9	81.3	85.4	88.2														
80	38.4	40.9	44.1	47.0	50.5														
85	11.6	13.7	16.0	18.4	20.7														
90	1.65	2.19	2.90	3.12	2.13														

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-04-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks: