
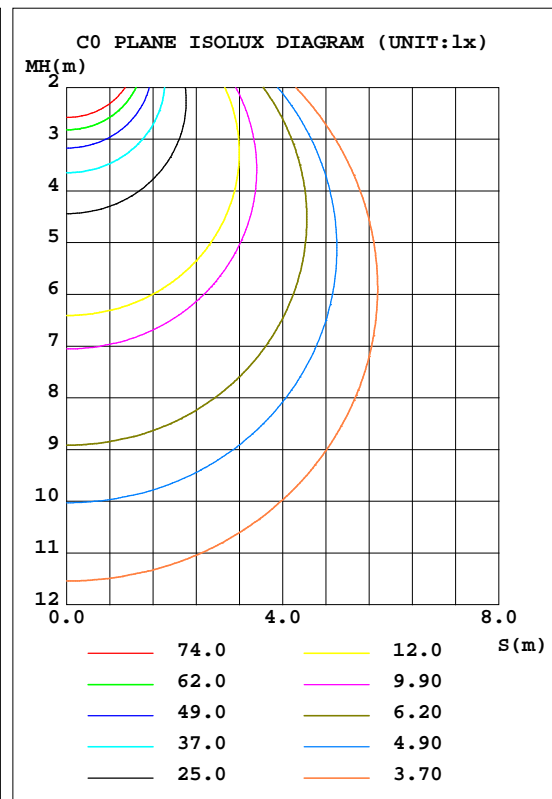


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.15 lm/W			
MODEL		I _{max} (cd)	508.3	S/MH(C0/180)	1.27
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	1480.4	η UP, DN(C0-180)	0.0,51.4
NOMINAL FLUX(lm)	1480.39	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,48.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.50

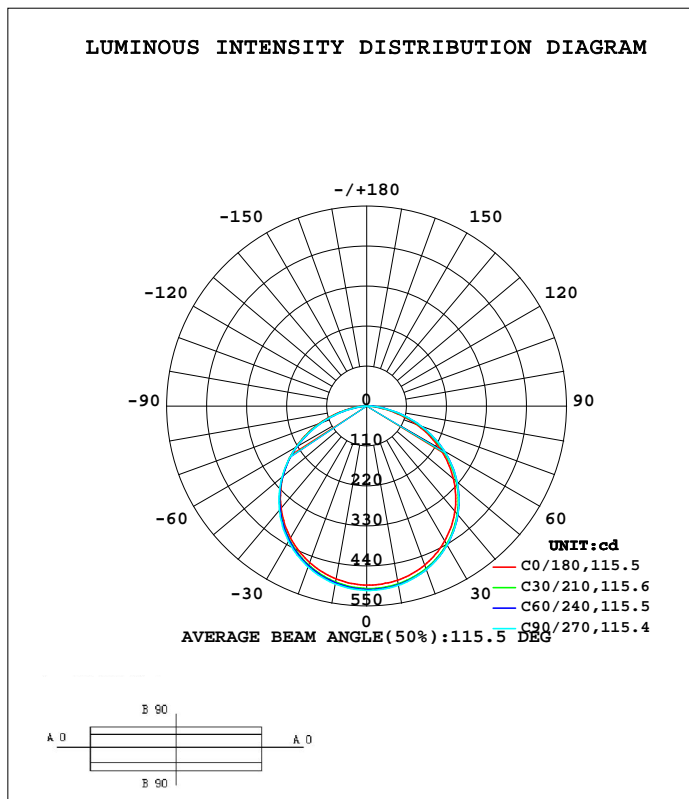

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	486.8	499.7	500.9	500.5	482.9	493.7	497.0	500.2	0- 10	47.80	47.80	3.23,3.23
20	465.9	479.0	479.1	477.1	458.4	467.3	471.2	476.1	10- 20	137.5	185.3	12.5,12.5
30	429.0	442.7	441.9	438.5	419.3	426.1	430.0	436.3	20- 30	210.1	395.4	26.7,26.7
40	377.7	391.3	389.8	385.7	366.6	370.5	374.0	381.1	30- 40	256.1	651.5	44,44
50	311.6	325.5	324.2	319.3	301.2	301.6	304.1	311.5	40- 50	268.9	920.4	62.2,62.2
60	232.3	246.3	246.0	240.5	223.7	220.6	221.6	228.7	50- 60	245.3	1166	78.7,78.7
70	142.7	156.6	157.5	152.1	137.6	130.9	129.8	135.8	60- 70	186.9	1353	91.4,91.4
80	53.76	65.27	67.09	62.26	51.23	44.24	40.57	45.69	70- 80	103.1	1456	98.3,98.3
90	0.8951	4.263	5.030	4.358	1.972	2.273	1.208	1.497	80- 90	24.73	1480	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 786.57 lm

%lum = 53.1%
 %lamp = 53.1%

Conical surface Flux(120deg): 1165.7 lm


%lum = 78.7%
 %lamp = 78.7%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

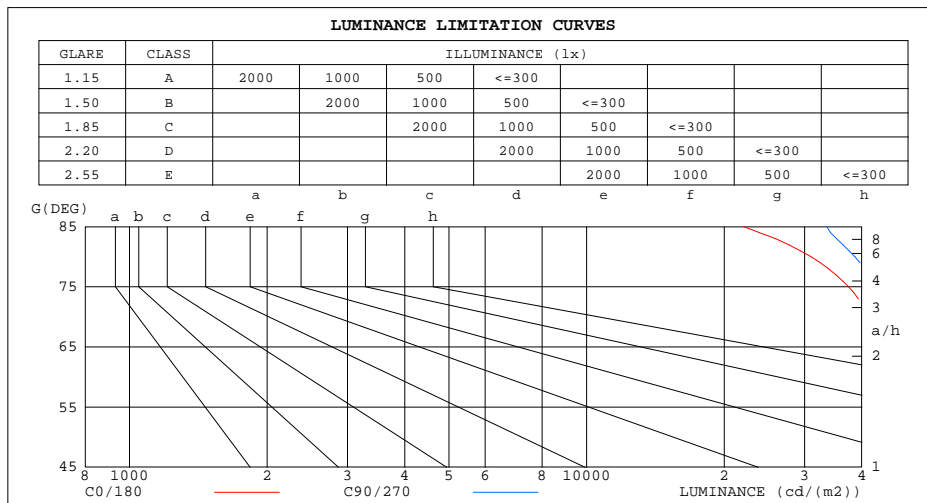

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	22029	33515
80	30959	38637
75	37413	43117
70	41709	46063
65	44615	47995
60	46467	49192
55	47682	49953
50	48478	50435
45	49012	50726


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

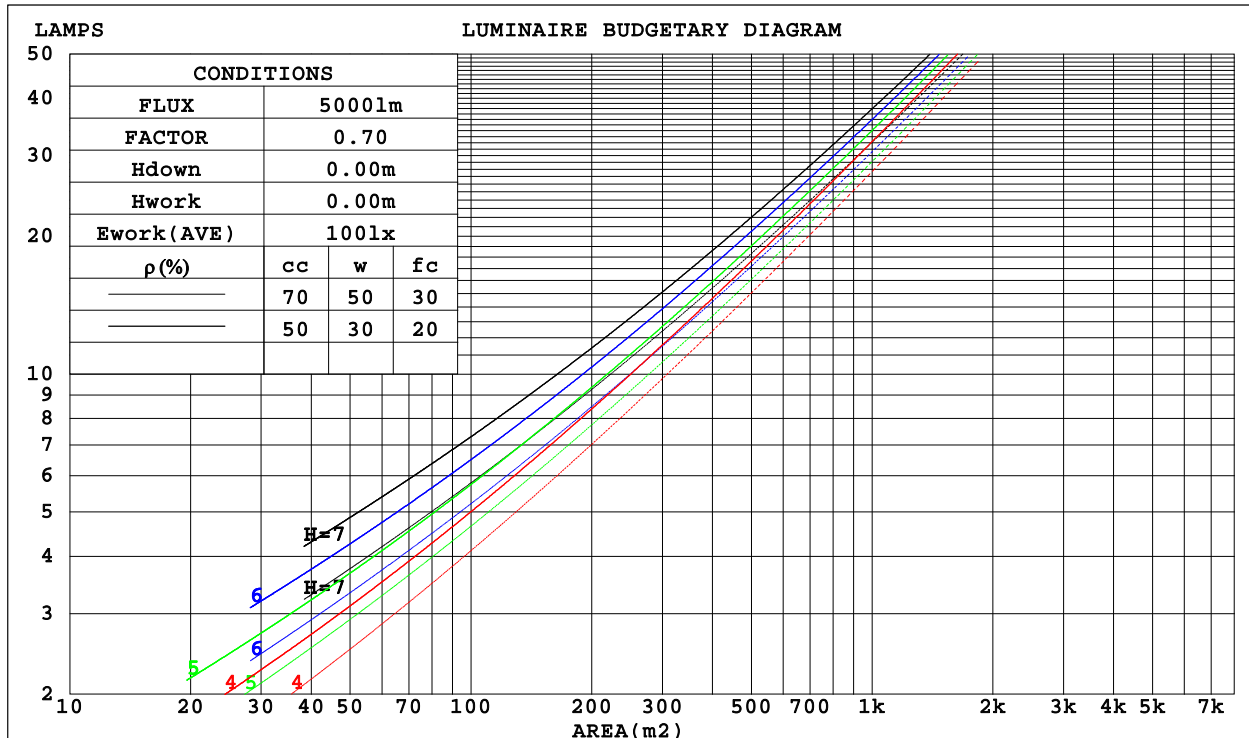

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.302	.172	.055	.289	.166	.053	.276	.159	.051	.265	.154	.050	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.271	.144	.043	.265	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.220	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.108	.031	.211	.106	.031	.203	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.084	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm										
NAME: UN-DC24-2835-160-12-9740-W10-3M					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:1000*10mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.5	28.1	26.8	28.3	28.5	26.7	28.3	27.0	28.5	28.7
3H	28.0	29.5	28.3	29.7	29.9	28.3	29.8	28.6	30.0	30.2
4H	28.6	30.0	28.9	30.2	30.5	29.0	30.3	29.3	30.6	30.9
6H	29.0	30.2	29.3	30.5	30.8	29.5	30.7	29.8	31.0	31.3
8H	29.1	30.3	29.4	30.6	30.9	29.6	30.8	29.9	31.1	31.4
12H	29.1	30.3	29.4	30.6	30.9	29.7	30.9	30.0	31.2	31.5
4H 2H	27.2	28.6	27.5	28.8	29.1	27.4	28.7	27.7	29.0	29.2
3H	28.9	30.1	29.3	30.4	30.7	29.2	30.3	29.5	30.6	30.9
4H	29.6	30.7	30.0	31.0	31.3	29.9	31.0	30.3	31.3	31.7
6H	30.1	31.0	30.5	31.4	31.7	30.5	31.5	30.9	31.8	32.2
8H	30.2	31.1	30.6	31.5	31.8	30.7	31.6	31.1	32.0	32.4
12H	30.3	31.1	30.7	31.5	31.9	30.9	31.7	31.3	32.1	32.5
8H 4H	29.9	30.8	30.3	31.2	31.5	30.2	31.1	30.6	31.5	31.8
6H	30.5	31.3	31.0	31.7	32.1	30.9	31.7	31.4	32.1	32.5
8H	30.7	31.4	31.2	31.8	32.3	31.2	31.9	31.7	32.3	32.7
12H	30.9	31.4	31.3	31.9	32.3	31.4	32.0	31.9	32.4	32.9
12H 4H	29.9	30.7	30.4	31.1	31.5	30.2	31.0	30.6	31.4	31.8
6H	30.6	31.2	31.1	31.7	32.1	31.0	31.6	31.5	32.1	32.5
8H	30.8	31.4	31.3	31.8	32.3	31.3	31.9	31.8	32.3	32.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				

CIE Pub.117, 1480 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.4)
 Area: 0.01 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	75	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

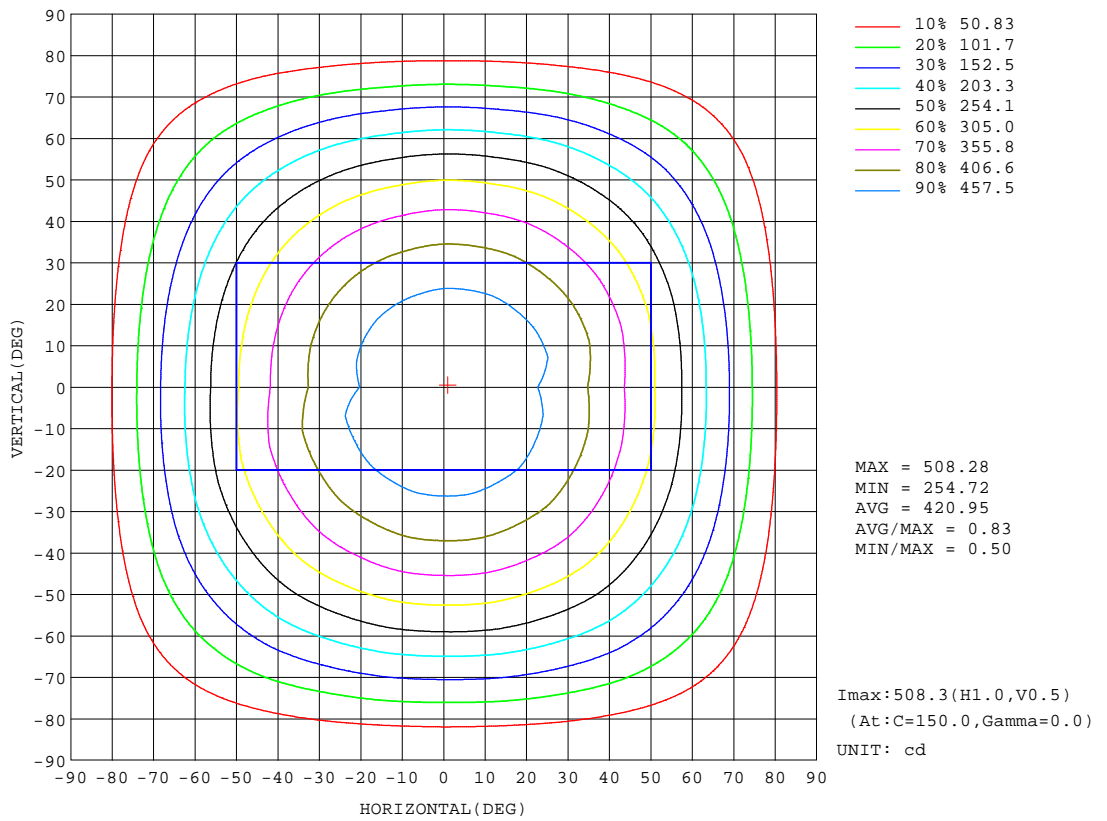


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

Flux out:1120 lm

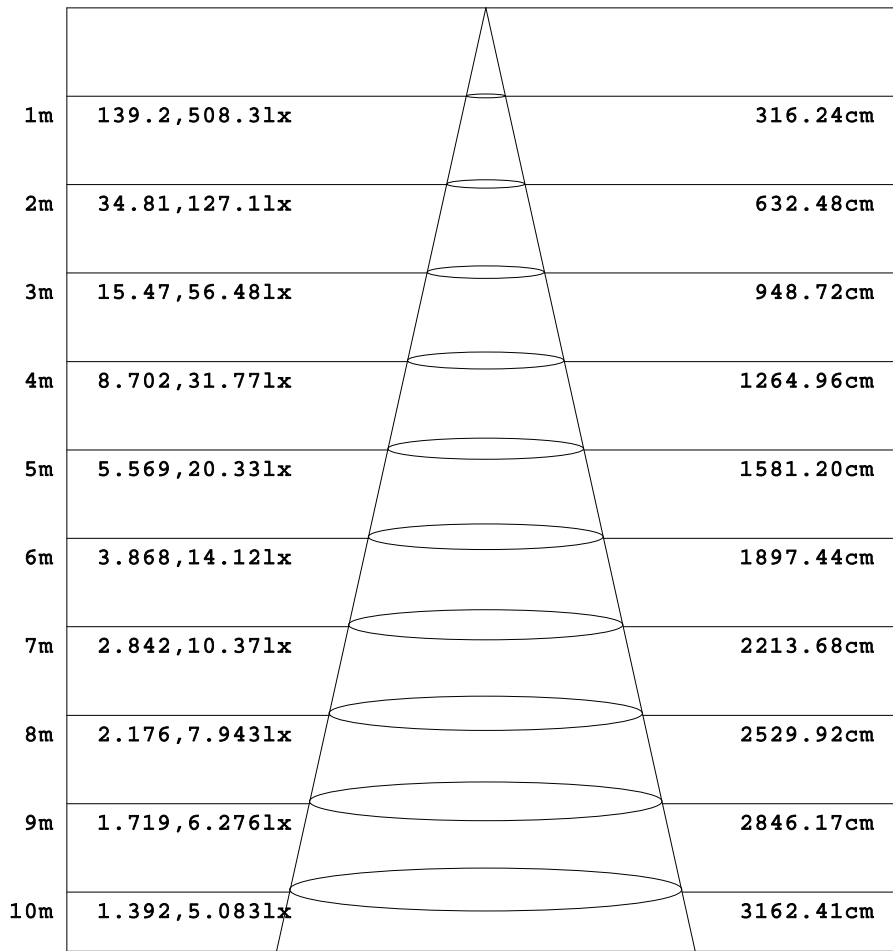

Height Eavg, Emax Angle:115.38deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

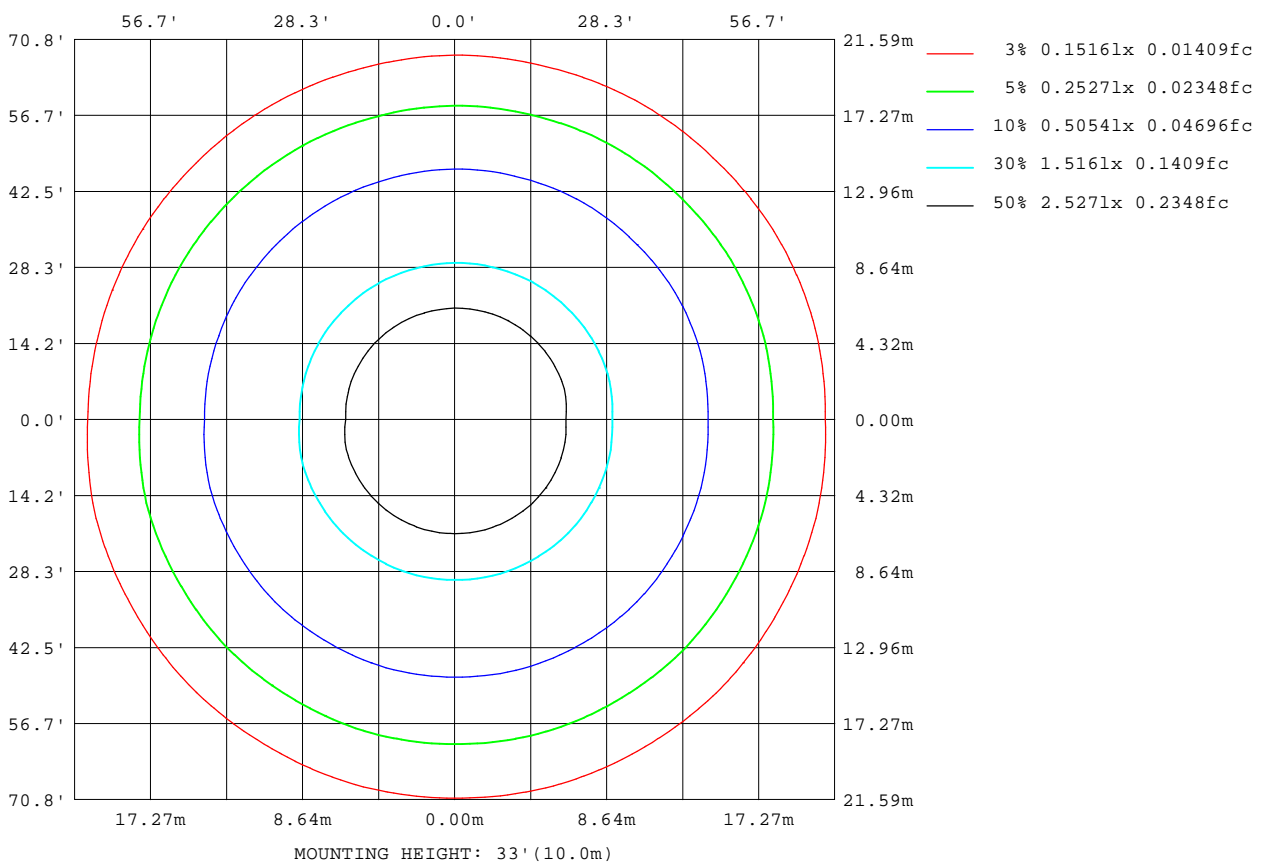

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

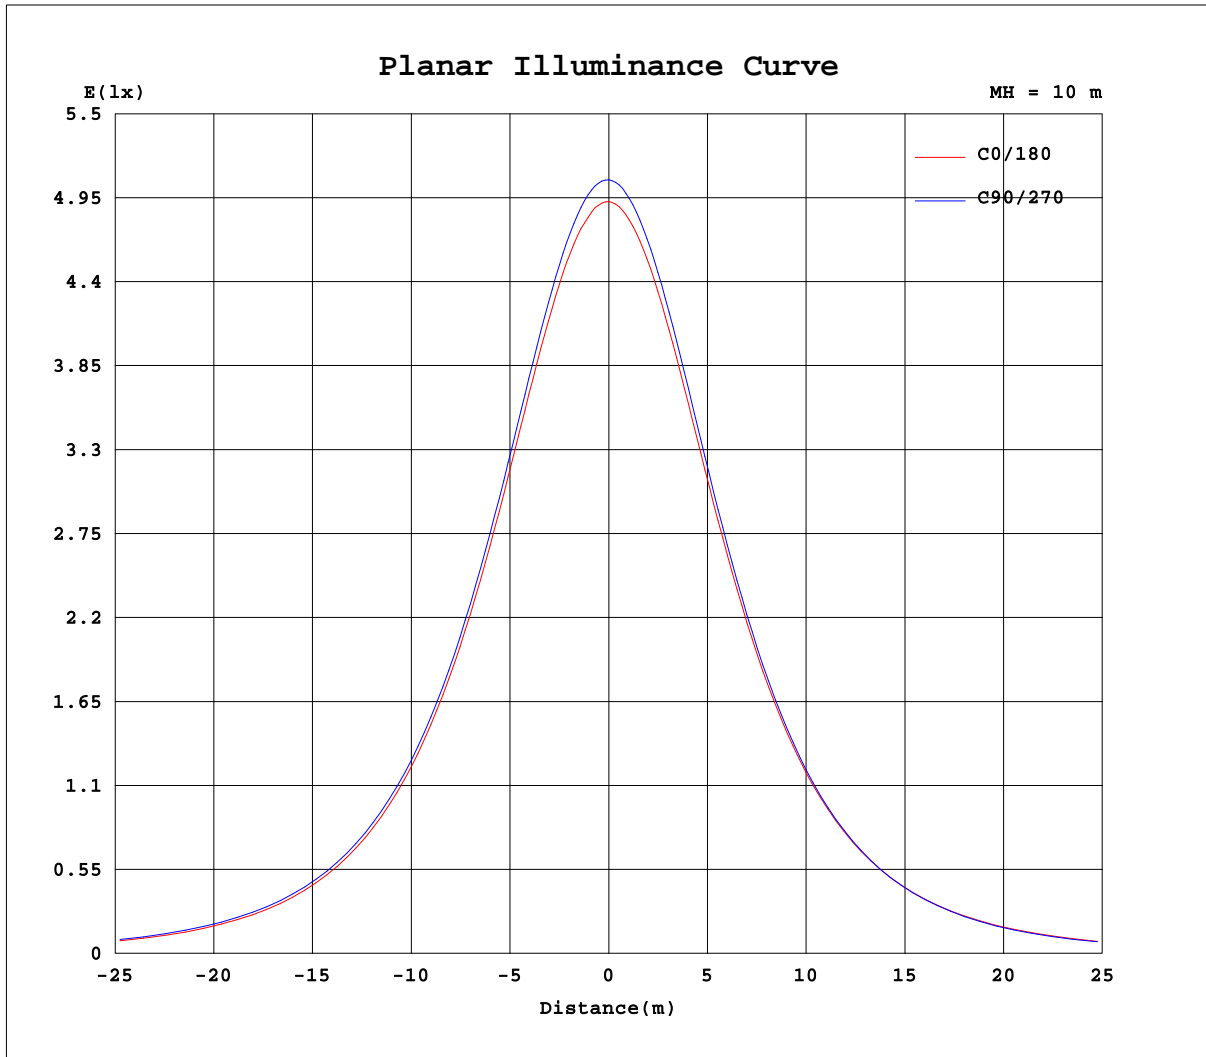

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	493	500	502	505	505	506	507	508	508	508	508	508	493	500	502	505	505	506	507
5	491	499	501	504	504	505	506	506	506	506	506	505	490	496	499	501	501	503	504
10	487	494	497	500	499	501	501	501	501	501	500	499	483	489	491	494	494	495	497
15	478	486	488	491	491	492	492	492	491	491	489	488	472	478	480	482	483	484	486
20	466	473	476	479	479	480	479	479	478	477	475	474	458	464	466	467	468	469	471
25	449	457	460	463	462	463	462	462	460	460	457	456	441	446	447	449	449	450	452
30	429	437	440	443	442	443	442	442	439	439	436	435	419	424	425	426	427	427	430
35	405	413	416	419	418	419	418	417	415	414	411	409	395	398	399	400	400	401	404
40	378	385	388	391	391	391	390	390	387	386	382	381	367	370	370	370	371	371	374
45	347	354	357	360	359	361	359	358	355	354	350	349	336	338	338	338	338	338	341
50	312	319	322	326	325	326	324	324	320	319	315	314	301	302	302	302	302	301	304
55	273	281	283	288	287	289	287	286	283	281	277	275	264	264	264	262	262	262	264
60	232	239	242	246	246	248	246	246	242	241	236	234	224	223	222	221	220	219	222
65	189	195	198	202	203	205	203	203	199	197	193	190	181	180	179	176	176	174	176
70	143	149	152	157	157	159	158	157	154	152	148	145	138	135	134	131	130	128	130
75	96.8	103	106	110	111	113	112	111	108	106	102	99.6	93.6	90.9	88.8	85.7	84.4	82.5	83.6
80	53.8	58.1	61.5	65.3	66.3	68.1	67.1	67.1	64.2	62.3	59.0	56.3	51.2	49.4	46.2	44.2	41.8	41.0	40.6
85	19.2	22.0	24.7	26.7	28.6	28.9	29.2	28.2	27.3	25.4	23.6	21.5	19.4	17.5	15.6	13.9	12.2	11.3	10.9
90	0.90	2.46	3.49	4.26	4.83	5.04	5.03	4.95	4.68	4.36	3.95	3.30	1.97	2.76	2.62	2.27	1.75	1.40	1.21

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 15.0DEG γ Interval: 1.0DEG
 Test Speed: HIGH Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Temperature:25.3DEG Humidity:65.0%
 Operators:XIAOMI Test Distance:9.000m [K=1.0000]
 Test Date:2023-04-20 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.201V I:0.5008A P:12.119W PF:1.0000 Freq:50.00Hz Lamp Flux:1480.39x1 lm		
NAME: UN-DC24-2835-160-12-9740-W10-3M	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*10mm	

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345													
0	508	508	508	508	508													
5	505	506	506	507	507													
10	498	499	500	501	501													
15	487	489	490	492	492													
20	472	475	476	478	479													
25	454	457	458	461	462													
30	431	435	436	440	441													
35	405	409	411	414	416													
40	375	379	381	385	387													
45	342	346	348	353	354													
50	305	310	311	316	318													
55	265	270	272	277	279													
60	222	227	229	234	236													
65	177	181	183	188	191													
70	130	134	136	141	143													
75	83.8	87.0	88.8	93.4	96.0													
80	41.6	43.0	45.7	48.3	51.9													
85	11.4	12.4	13.9	15.7	17.6													
90	1.24	1.33	1.50	1.62	1.54													

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-20

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: