
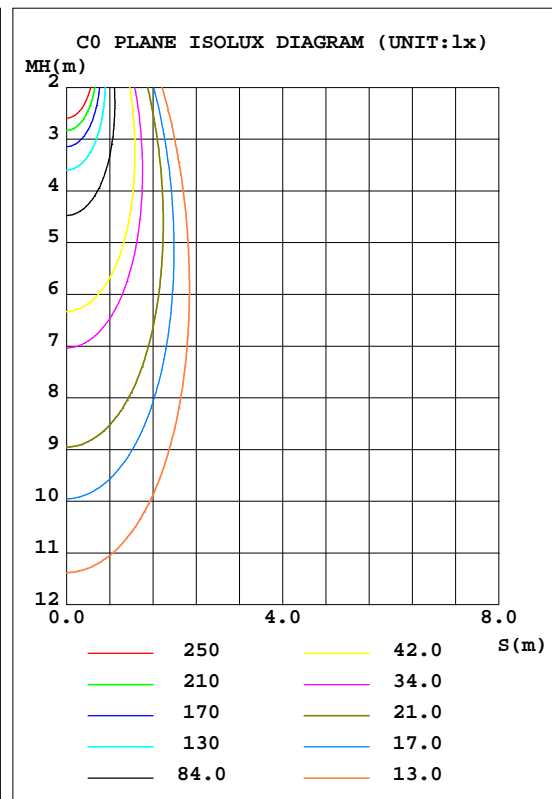


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.20 lm/W			
MODEL		I _{max} (cd)	1694	S/MH(C0/180)	0.52
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.45
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	897.12	η UP, DN(C0-180)	0.0,55.0
NOMINAL FLUX(lm)	897.118	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,45.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	0.60

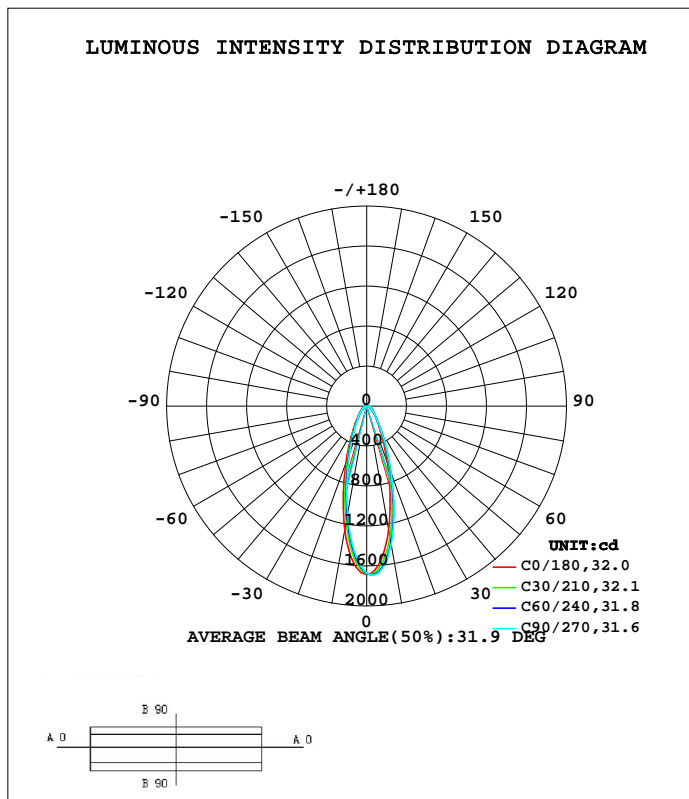

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1262	1372	1412	1372	1265	1150	1102	1108	0- 10	137.9	137.9	15.4,15.4
20	609.5	701.7	721.8	716.4	609.8	535.8	510.3	512.6	10- 20	249.7	387.6	43.2,43.2
30	268.5	308.5	305.4	317.7	272.8	237.7	226.5	229.0	20- 30	189.1	576.6	64.3,64.3
40	134.9	145.8	144.2	150.5	136.8	120.8	115.9	118.1	30- 40	118.0	694.7	77.4,77.4
50	78.66	82.94	87.17	85.24	79.65	69.61	66.76	69.20	40- 50	78.33	773.0	86.2,86.2
60	48.52	50.06	55.69	50.94	47.97	42.31	38.83	42.67	50- 60	54.42	827.4	92.2,92.2
70	28.62	31.96	34.07	31.97	28.20	26.16	23.28	25.81	60- 70	37.22	864.6	96.4,96.4
80	11.40	17.83	18.07	18.01	10.95	12.92	11.20	12.29	70- 80	22.71	887.3	98.9,98.9
90	0.9259	5.687	5.901	5.819	0.5752	3.579	4.078	3.973	80- 90	9.783	897.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 737.4 lm

%lum = 82.2%
 %lamp = 82.2%

Conical surface Flux(120deg): 827.41 lm


%lum = 92.2%
 %lamp = 92.2%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

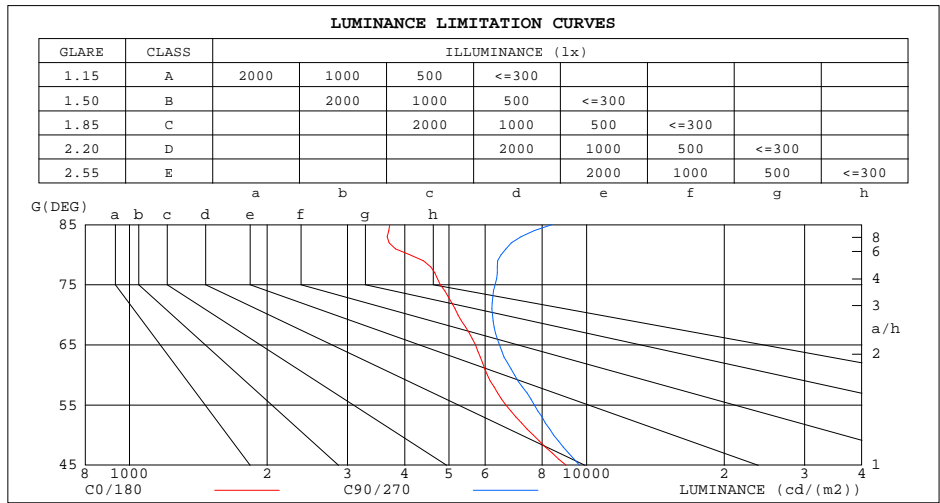

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3712	8400
80	4103	6503
75	4788	6310
70	5229	6226
65	5713	6450
60	6065	6962
55	6668	7691
50	7648	8476
45	9023	9661


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.00	.98	.99	.97	.95	.95	.94	.93	.91
2.0	.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.87	.84	.83
3.0	.92	.87	.82	.91	.86	.81	.88	.84	.80	.86	.82	.79	.83	.80	.78	.76
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.74	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.74	.69	.79	.73	.69	.77	.72	.68	.76	.71	.67	.74	.70	.67	.65
6.0	.75	.69	.64	.74	.68	.64	.73	.68	.64	.71	.67	.63	.70	.66	.63	.61
7.0	.71	.65	.60	.70	.64	.60	.69	.63	.60	.68	.63	.59	.67	.62	.59	.57
8.0	.67	.61	.56	.66	.61	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.54
9.0	.64	.57	.53	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.51
10.0	.61	.55	.51	.60	.54	.51	.59	.54	.50	.58	.54	.50	.58	.53	.50	.49

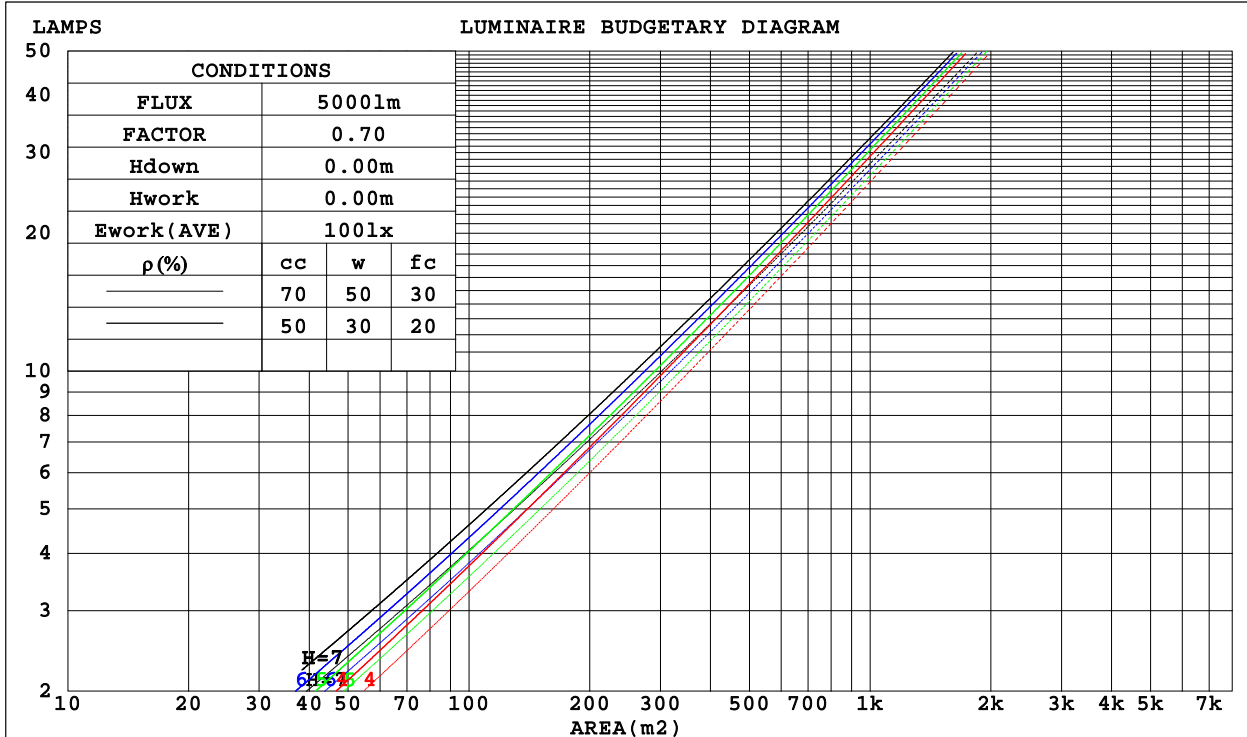

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.214	.122	.039	.208	.118	.038	.195	.112	.036	.183	.106	.034	.172	.100	.032	
2.0	.200	.110	.034	.195	.107	.033	.184	.102	.032	.174	.097	.030	.164	.093	.029	
3.0	.187	.099	.030	.182	.097	.029	.172	.093	.028	.164	.090	.028	.156	.086	.027	
4.0	.174	.091	.027	.170	.089	.026	.162	.086	.026	.154	.083	.025	.147	.080	.024	
5.0	.163	.083	.024	.159	.082	.024	.152	.079	.023	.146	.077	.023	.139	.075	.022	
6.0	.153	.077	.022	.150	.076	.022	.144	.074	.021	.138	.072	.021	.132	.070	.021	
7.0	.144	.071	.020	.141	.070	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019	
8.0	.136	.067	.019	.134	.066	.019	.129	.064	.018	.124	.063	.018	.120	.062	.018	
9.0	.129	.063	.017	.127	.062	.017	.123	.061	.017	.118	.059	.017	.115	.058	.017	
10.0	.123	.059	.016	.121	.058	.016	.117	.057	.016	.113	.056	.016	.110	.055	.016	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.160	.132	.109	.137	.114	.094	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.086	.127	.098	.075	.087	.068	.052	.050	.040	.031	.016	.013	.010	
4.0	.138	.099	.069	.119	.086	.060	.082	.060	.043	.047	.035	.025	.015	.011	.008	
5.0	.130	.088	.057	.111	.076	.050	.077	.053	.035	.044	.031	.021	.014	.010	.007	
6.0	.122	.079	.048	.105	.068	.042	.072	.048	.029	.042	.028	.018	.014	.009	.006	
7.0	.115	.071	.041	.099	.062	.035	.068	.043	.025	.040	.025	.015	.013	.008	.005	
8.0	.109	.065	.035	.093	.056	.031	.065	.040	.022	.038	.023	.013	.012	.008	.004	
9.0	.103	.060	.030	.089	.052	.027	.061	.036	.019	.036	.022	.011	.012	.007	.004	
10.0	.098	.055	.027	.084	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm										
NAME: UN-AC220-2835-36-10-940-W16-T301-UD					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:1000*16mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.0	18.1	17.3	18.3	18.4	17.6	18.6	17.8	18.8	19.0
3H	18.1	19.1	18.4	19.3	19.5	18.7	19.7	19.0	19.9	20.1
4H	18.6	19.5	18.9	19.7	20.0	19.3	20.3	19.6	20.5	20.7
6H	18.9	19.8	19.2	20.1	20.3	19.9	20.7	20.2	21.0	21.2
8H	19.0	19.9	19.4	20.1	20.4	20.1	20.9	20.4	21.2	21.5
12H	19.1	19.9	19.4	20.2	20.5	20.4	21.2	20.7	21.4	21.7
4H 2H	17.5	18.4	17.8	18.6	18.9	18.0	18.9	18.2	19.1	19.3
3H	18.8	19.6	19.1	19.9	20.2	19.4	20.2	19.7	20.4	20.7
4H	19.4	20.2	19.8	20.5	20.8	20.1	20.8	20.5	21.1	21.5
6H	20.0	20.6	20.3	21.0	21.3	20.8	21.5	21.2	21.8	22.2
8H	20.2	20.8	20.6	21.1	21.5	21.1	21.7	21.5	22.1	22.5
12H	20.3	20.9	20.7	21.3	21.7	21.5	22.0	21.9	22.4	22.8
8H 4H	19.8	20.4	20.2	20.7	21.1	20.3	21.0	20.7	21.3	21.7
6H	20.5	21.0	20.9	21.4	21.8	21.2	21.8	21.7	22.1	22.6
8H	20.9	21.3	21.3	21.7	22.2	21.7	22.1	22.1	22.6	23.0
12H	21.2	21.6	21.7	22.1	22.5	22.2	22.6	22.6	23.0	23.5
12H 4H	19.8	20.4	20.2	20.7	21.1	20.4	20.9	20.8	21.3	21.7
6H	20.6	21.1	21.1	21.5	21.9	21.3	21.8	21.8	22.2	22.6
8H	21.1	21.5	21.5	21.9	22.4	21.8	22.2	22.3	22.7	23.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 897.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.4)
 Area: 0.016 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	78	70	65	77	69	65	76	69	64	60
0.80	86	78	73	85	78	73	84	77	73	68
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	85	95	89	85	93	88	84	79
1.50	100	94	89	99	93	89	96	91	87	82
2.00	104	98	94	102	97	93	99	95	92	86
2.50	106	101	97	105	100	96	101	98	94	88
3.00	109	104	100	107	102	99	103	100	97	90
4.00	111	107	104	109	106	103	105	103	100	93
5.00	113	110	107	111	108	105	106	104	102	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

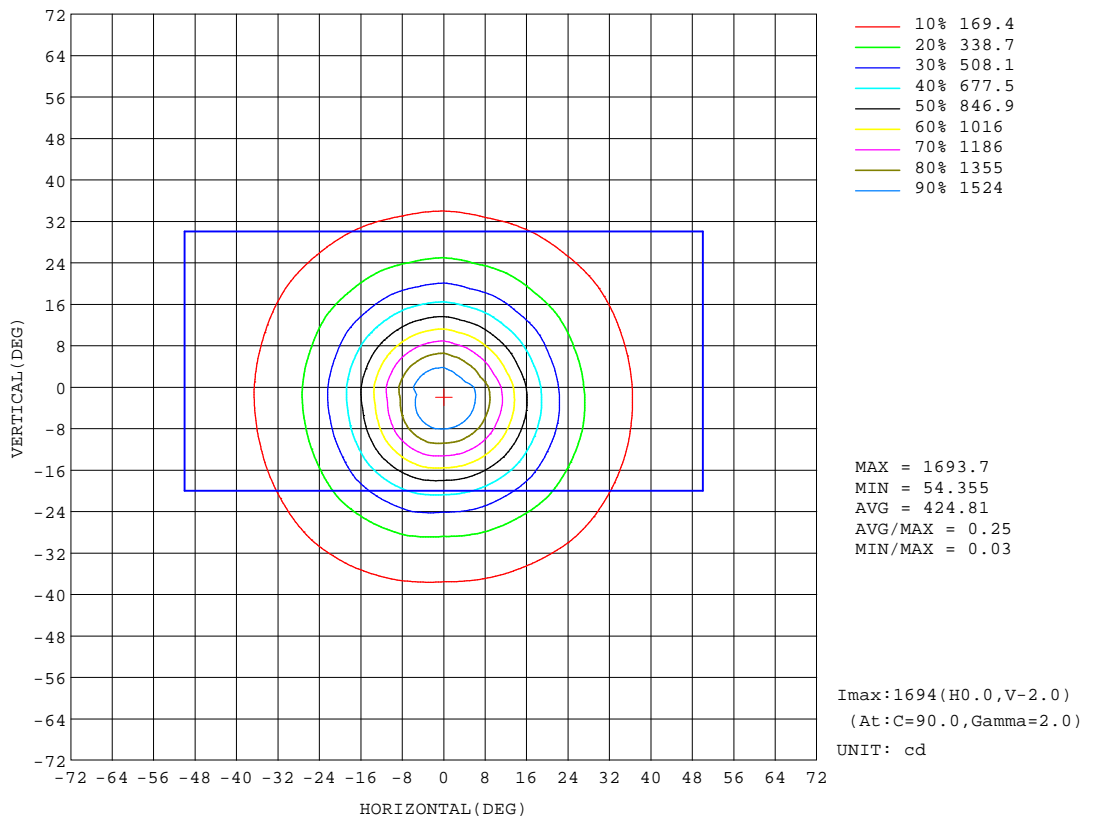


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

Flux out:290.1 lm

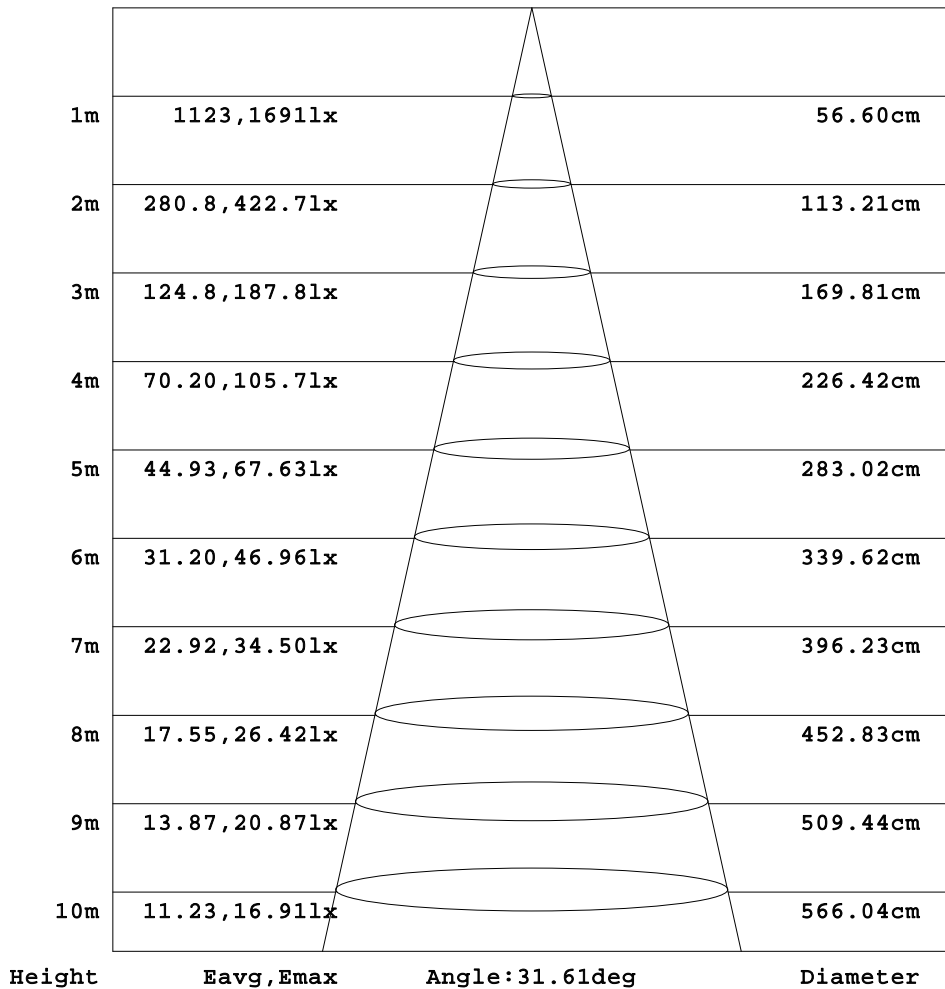


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

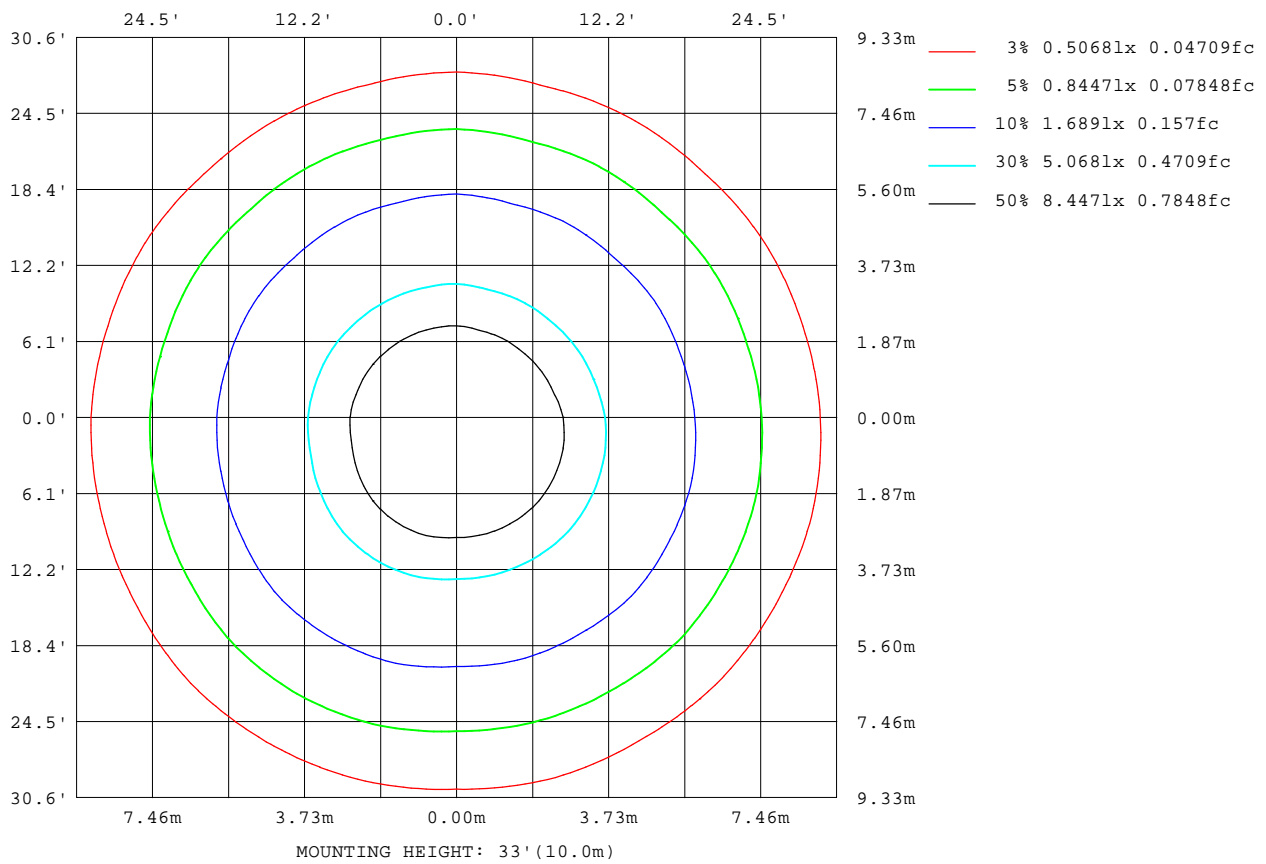

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

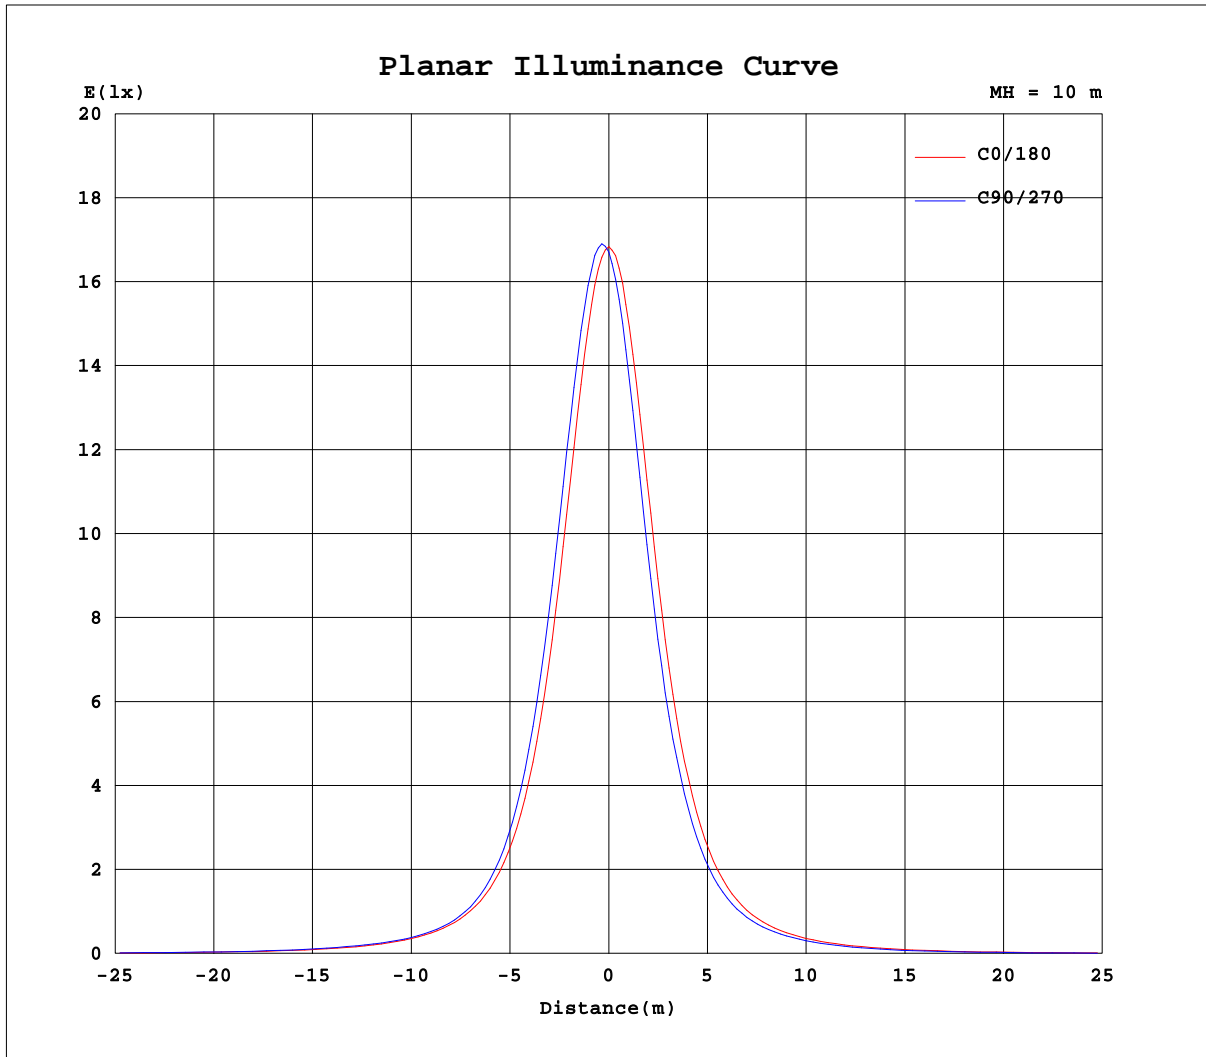

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-04-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1684	1681	1679	1674	1674	1669	1671	1656	1649	1635	1633	1628	1684	1681	1679	1674	1674	1669	1671
5	1563	1585	1606	1628	1637	1650	1648	1652	1634	1611	1576	1540	1563	1537	1511	1488	1470	1458	1455
10	1262	1307	1337	1372	1393	1410	1412	1422	1403	1372	1320	1269	1265	1218	1187	1150	1125	1107	1102
15	908	952	989	1023	1043	1056	1058	1081	1065	1035	979	927	908	868	837	802	781	762	761
20	609	645	674	702	713	722	722	745	739	716	669	627	610	582	561	536	525	506	510
25	401	430	444	470	468	478	472	497	490	482	443	421	408	385	376	355	348	334	337
30	268	285	294	309	306	310	305	323	322	318	294	281	273	259	252	238	233	224	227
35	186	195	199	207	204	206	203	213	214	213	200	193	188	180	175	165	162	157	158
40	135	140	142	146	144	146	144	150	151	150	144	139	137	131	127	121	118	115	116
45	102	106	107	108	108	111	109	111	111	112	108	105	103	99.2	96.3	91.1	88.8	86.5	87.5
50	78.7	81.3	81.7	82.9	84.5	88.9	87.2	85.6	84.7	85.2	82.8	81.1	79.6	76.1	73.8	69.6	67.8	66.0	66.8
55	61.2	63.1	63.5	64.6	67.4	72.2	70.6	68.0	65.8	65.9	64.5	63.2	62.0	59.3	57.0	53.7	51.2	50.7	50.3
60	48.5	49.1	50.1	50.1	53.8	56.4	55.7	53.9	51.9	50.9	50.9	49.2	48.0	47.0	44.2	42.3	39.9	39.1	38.8
65	38.6	39.5	40.2	40.2	42.8	43.7	43.6	42.4	41.6	40.5	40.5	39.1	38.0	37.4	35.0	33.6	31.5	30.3	30.0
70	28.6	30.4	31.4	32.0	33.6	34.1	34.1	33.2	32.9	32.0	31.4	30.0	28.2	28.5	27.0	26.2	24.3	23.5	23.3
75	19.8	22.3	23.9	24.2	25.6	26.0	26.1	25.6	25.4	24.3	23.9	21.9	19.5	20.1	20.1	18.9	18.3	17.4	17.1
80	11.4	14.9	17.1	17.8	17.9	18.1	18.1	18.0	18.0	18.0	17.1	14.5	10.9	12.9	13.9	12.9	11.9	11.3	11.2
85	5.18	10.9	11.8	11.4	11.4	11.6	11.7	11.8	11.7	11.6	11.7	10.1	4.63	8.90	8.74	6.82	6.09	5.70	5.67
90	0.93	3.77	5.56	5.69	5.63	5.69	5.90	5.84	5.86	5.82	5.49	3.63	0.58	2.10	3.31	3.58	3.84	4.02	4.08

C Range: 0 - 360DEG γ Range: 0 - 90DEG
 C Interval: 15.0DEG γ Interval: 1.0DEG
 Test Speed: HIGH Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Temperature:25.3DEG Humidity:65.0%
 Operators:XIAOMI Test Distance:9.000m [K=1.0000]
 Test Date:2023-04-21 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.11V I:0.0489A P:10.057W PF:0.9345 Freq:50.00Hz Lamp Flux:897.118x1 lm		
NAME: UN-AC220-2835-36-10-940-W16-T301-UD	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*16mm	

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	1656	1649	1635	1633	1628														
5	1432	1436	1442	1462	1484														
10	1082	1096	1108	1145	1180														
15	741	756	768	806	841														
20	492	508	513	544	564														
25	326	337	340	362	375														
30	219	226	229	244	252														
35	154	158	160	170	176														
40	113	116	118	125	128														
45	85.7	88.3	89.7	94.5	97.5														
50	65.8	68.0	69.2	73.0	75.1														
55	50.9	51.8	53.9	56.7	58.6														
60	39.9	40.9	42.7	44.1	46.8														
65	31.0	32.4	33.7	34.9	37.0														
70	24.1	24.7	25.8	26.5	28.1														
75	17.4	18.2	18.6	19.8	20.2														
80	11.1	11.5	12.3	13.8	13.5														
85	5.57	5.86	6.62	8.71	9.45														
90	4.07	4.00	3.97	3.79	2.76														

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 15.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Temperature:25.3DEG	Humidity:65.0%
Operators:XIAOMI	Test Distance:9.000m [K=1.0000]
Test Date:2023-04-21	Remarks: