

Flexible Neon Strip Specifications

UN-BJ-DC24-2835-140-12-9xx-1212-ZC-IP65



Product Features:






- Integrated Silicon-extrusion technological process,Uniform lighting,Top-bend & Side-bend;
- Super-slim molded end cap of same size,Multiple wires output,Seamless connection;
- 10M driven by one end ,full accessories,Easy to intall profile,Stable and secure.

Parameter Details :


Bending Direction: 3D
 Color: Static color-White
 Control mode: Switch/Dimming
 Led Type: 2835
 Led/M: 140
 Power per meter: 12W
 Working temperature: -20°C-45°C
 Voltage: DC24V

Lumens output:

- 2700K 748lm/M
- 3000K 798m/M
- 4000K 845lm/M
- 6000K 890lm/M

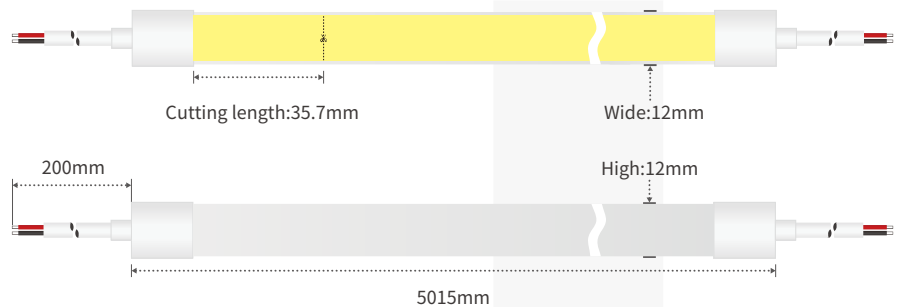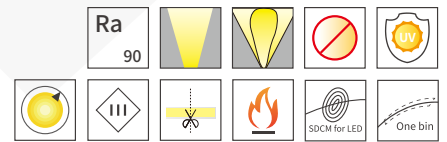

Light Distribution:

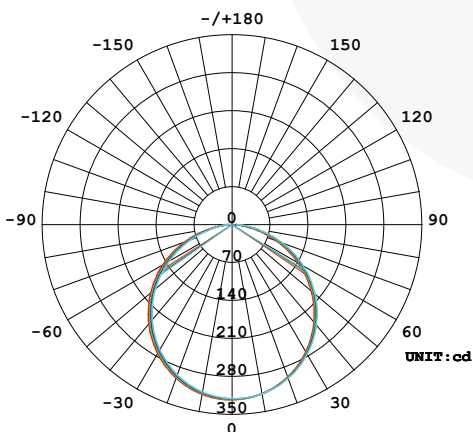

AVERAGE BEAM ANGLE(50%):113.1DEC

Flux out:682.6 lm

Height	Eavg, Emax	Angle:112.61deg	Diameter
1m	91.63, 322.91x		299.94cm
2m	22.91, 80.731x		599.88cm
3m	10.18, 35.881x		899.82cm
4m	5.727, 20.181x		1199.76cm
5m	3.665, 12.921x		1499.70cm
6m	2.545, 8.9701x		1799.64cm
7m	1.870, 6.5901x		2099.58cm
8m	1.432, 5.0461x		2399.52cm
9m	1.131, 3.9871x		2699.46cm
10m	0.9163, 3.2291x		2999.40cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Packaging Details:

· standard packaging


1. Technical details marked on the side of strip packed in circles.




4. Stick the label at the bottom of inner box.

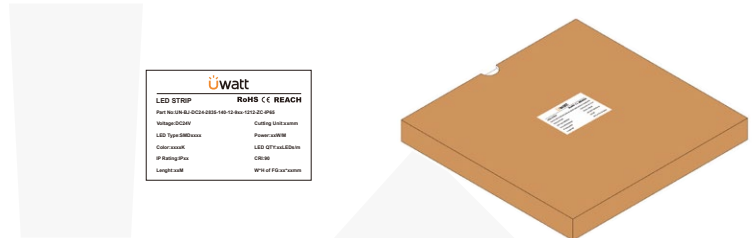


2. Pack the circled strip with blister.

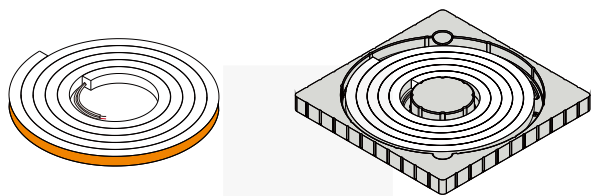

5. Put Ten boxes into outer carton.

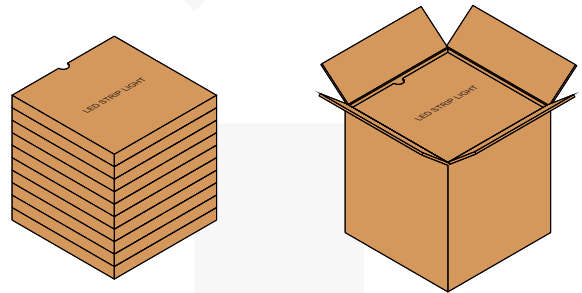

3. Put strip with blister into inner box.

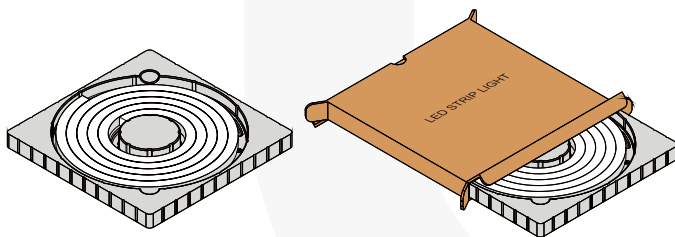

6. Put the packing list on outer carton.



Model	Product size	Product Quantity/box	Product Quantity/case	Product net weight (kg)	Net weight per box (kg)	Gross weight (kg)	Carton size
UN-BJ-DC24-2835-140-12-9xx-1212-ZC-IP65	L5000*12*12mm	5M*1	25M	0.93	1.44	15.97	440*425*420MM

Precautions:

· Please use an isolated power supply to drive the LED light bar, and the ripple of the constant voltage source is less than 5%. Do not use resistance-capacitance step-down, non-isolated power supplies to drive the LED light bar.

· In actual applications, the power supply should reserve 20% of the margin (it is recommended to use only 80% of the power) to ensure sufficient voltage to drive the product.

· Please operate carefully, do not touch the AC power terminal when the power is on to prevent electric shock.

· Pay attention to the positive and negative poles of the power cord, and do not connect it wrongly. Whether the voltage of the power supply and the product are the same, so as to avoid damage to the product.

· During the installation process, please avoid scratching, twisting and irregular bending of the product, otherwise it may cause irreparable damage to the product.

· In order to ensure the life and reliability of the light strip, please do not bend it in an arc with a radius of less than 60mm. A too small bending radius will damage the product itself.

· If the actual application length exceeds the specified use length, it will cause the lamp belt to overload and heat, and the brightness is uneven.

· In order to prevent your eyes from being hurt, try to avoid staring at the light-emitting surface of the light bar for a long time.

· Non-professionals are prohibited from installing, disassembling and repairing the product.

· It is strictly forbidden to use any acidic or alkaline adhesives to fix products (including but not limited to glass glue, etc.).

· IP67 protection products are not suitable for swimming pool underwater.

· Products of different sizes and specifications under the same color temperature value due to structural differences, the final color of the product is slightly deviated, and it must be confirmed before use.

· When the IP67 protection product is installed and applied, the waterproof level needs to be downgraded after self-processing and cutting.

· Please use professional cutting tools when cutting.

· Engineering packaging neon light belt (20~50m), please use pay-off rack during construction to avoid damage to the product caused by pulling force.

· Attention, there are 2 soldering parts per reel (5m/reel) at most when mass production.



No stretching



No distortion



No trampling